






1. For each dominating set, draw the dominating sets you get by applying the 8 symmetries of the chessboard. For flip: flip across primary diagonal (vertex 0 maps to vertex 0).

Consider the symmetries in this order:

identity, rotate  $90^\circ$ , rotate  $180^\circ$ , rotate  $270^\circ$ ,  
flip, then rotate  $90^\circ$ , rotate  $180^\circ$ , rotate  $270^\circ$ .

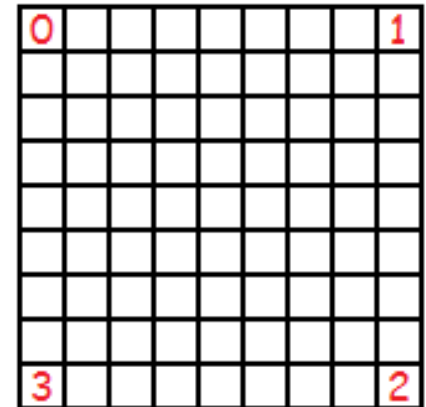

2. For each dominating set, which symmetries are automorphisms?
3. How many different dominating sets does each dominating set correspond to?

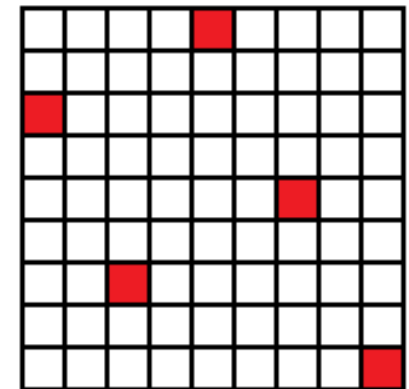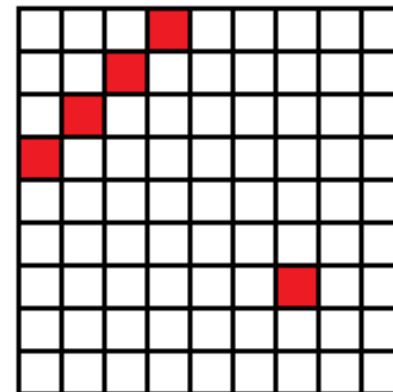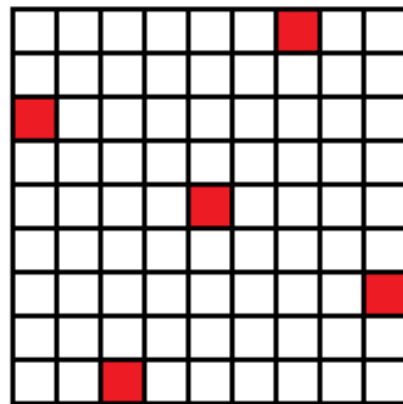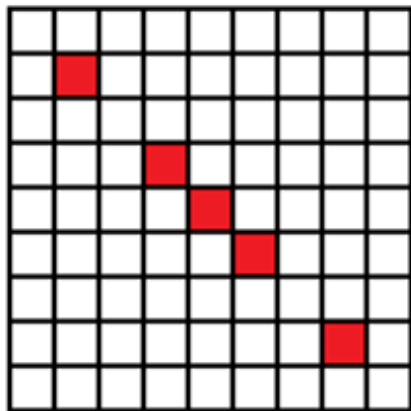


## Announcements:

Assignment #5: due at the beginning of class on Fri. Nov. 7.

There is are no classes Nov. 10-12.

There is a class on Friday Nov. 14.


A **directed graph**  $G$  consists of a set  $V$  of **vertices** and a set  $E$  of **arcs** where each arc in  $E$  is associated with an **ordered pair** of vertices from  $V$ .

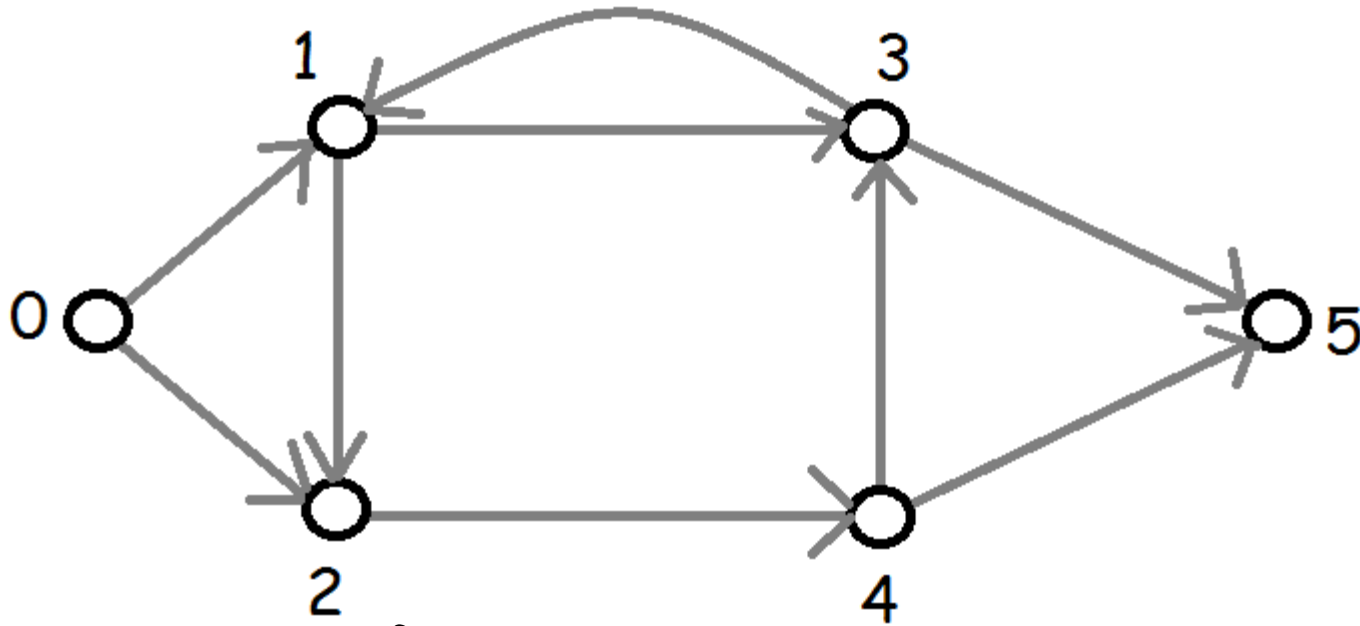

$$V = \{0, 1, 2, 3, 4, 5\}$$


$$E = \{(0,1), (0,2), (1,2), (1,3), (2,4), (3,1), (3,5), (4,3), (4,5)\}$$

A directed graph  $G$ :

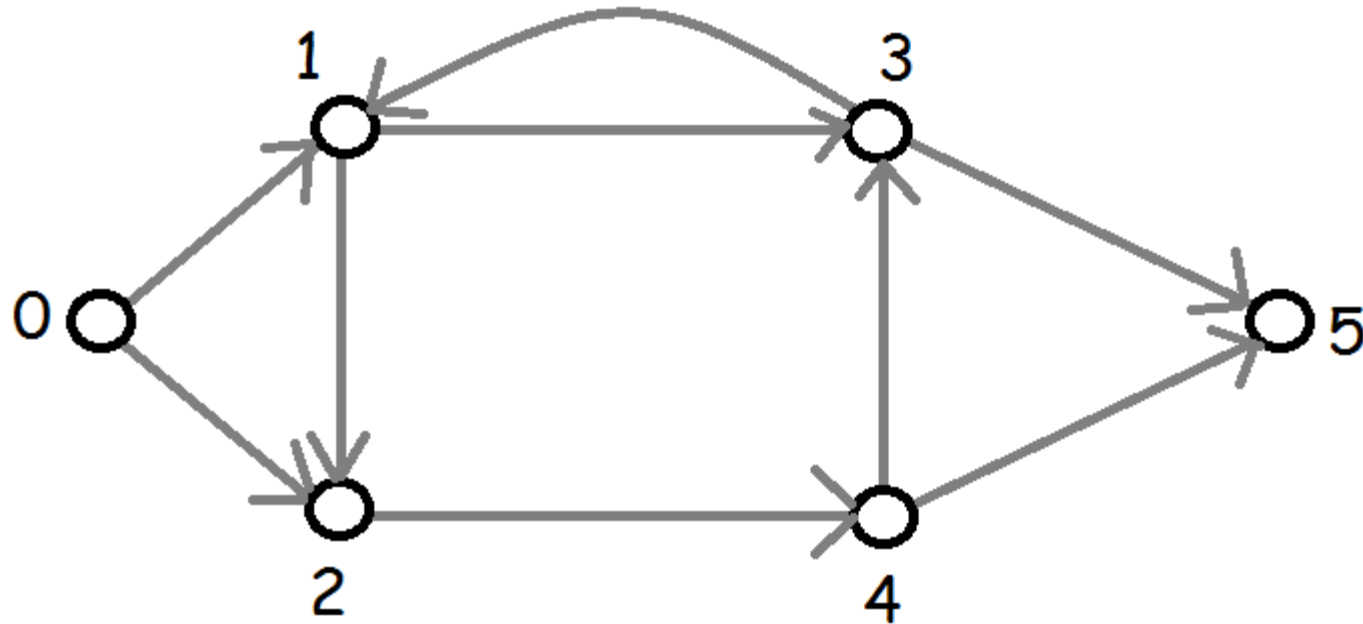


Remark: In a talk, I might just use the pictures without as many words, but I would not use words without pictures.

A directed graph  $G$ :

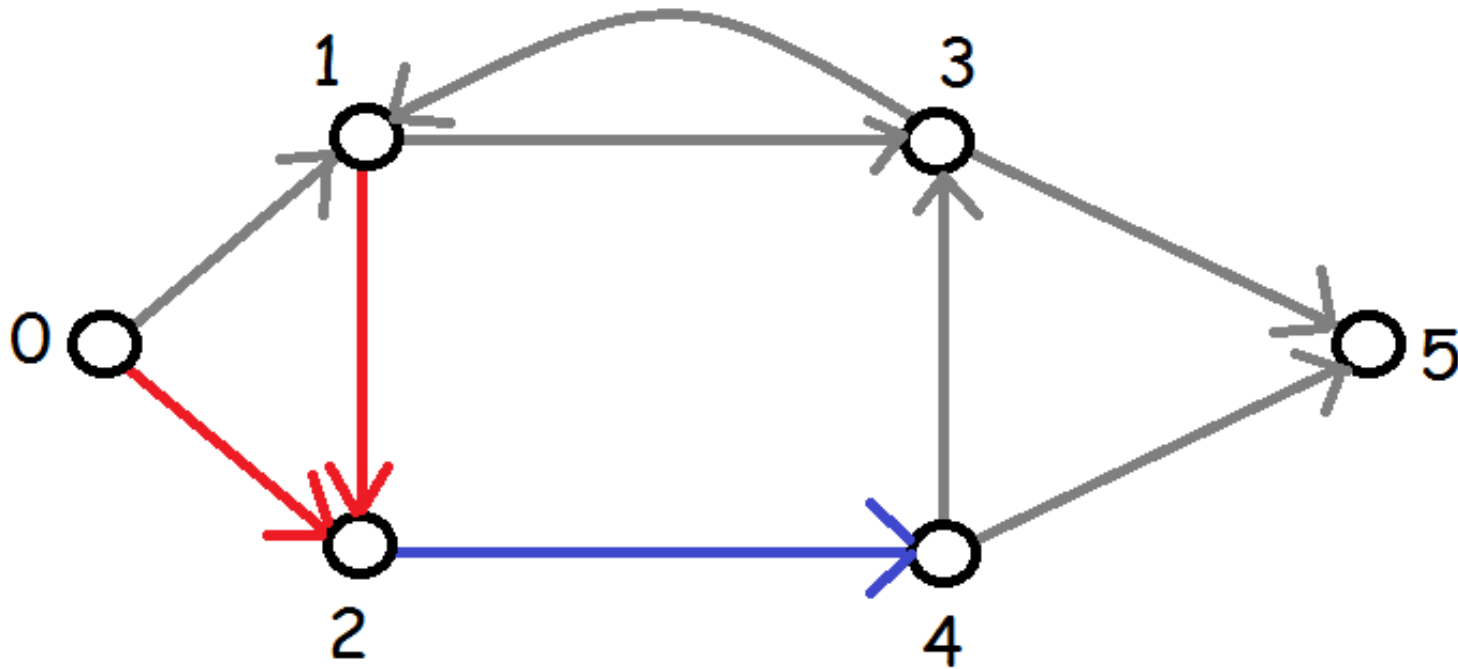


Vertex 2 has **in-degree 2** and **out-degree 1**.

A **directed cycle** of **length k** consists of an alternating sequence of vertices and arcs of the form:  $v_0, e_1, v_1, e_2, \dots, v_{k-1}, e_k, v_k$  where  $v_0 = v_k$  but otherwise the vertices are distinct and where  $e_{i+1}$  is the arc  $(v_i, v_{i+1})$  for  $i = 0, 1, 2, \dots, k-1$ .

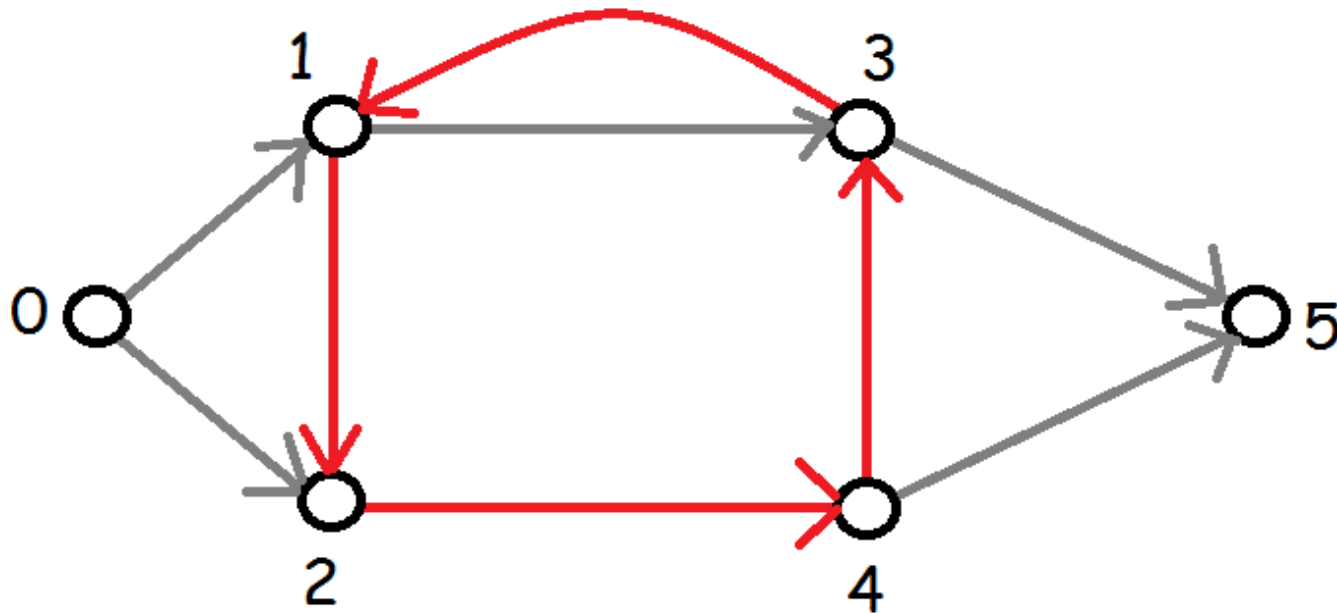


1, (1,2), 2, (2,4), 4, (4,3), 3, (3,1), 1

A directed cycle of length 4:

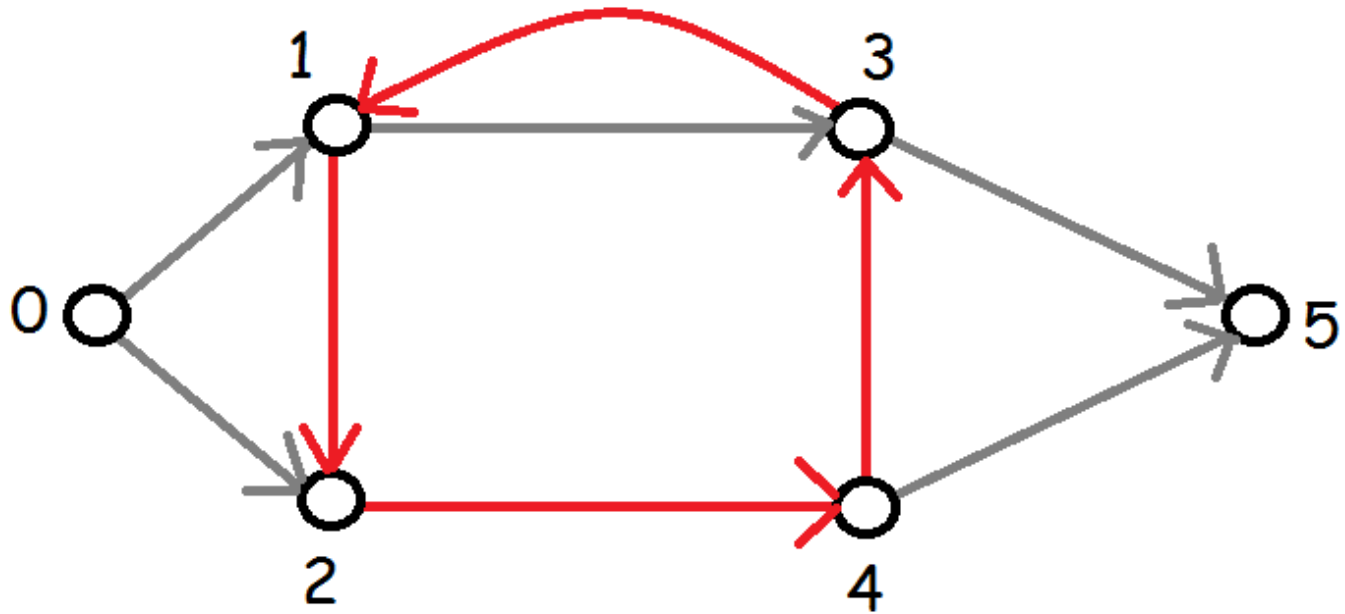


A **cycle of length  $k$**  consists of an alternating sequence of vertices and arcs of the form:  $v_0, e_1, v_1, e_2, \dots, v_{k-1}, e_k, v_k$  where  $v_0 = v_k$  but otherwise the vertices are distinct and where  $e_{i+1}$  is either the arc  $(v_i, v_{i+1})$  or  $(v_{i+1}, v_i)$  for  $i = 0, 1, 2, \dots, k-1$ .

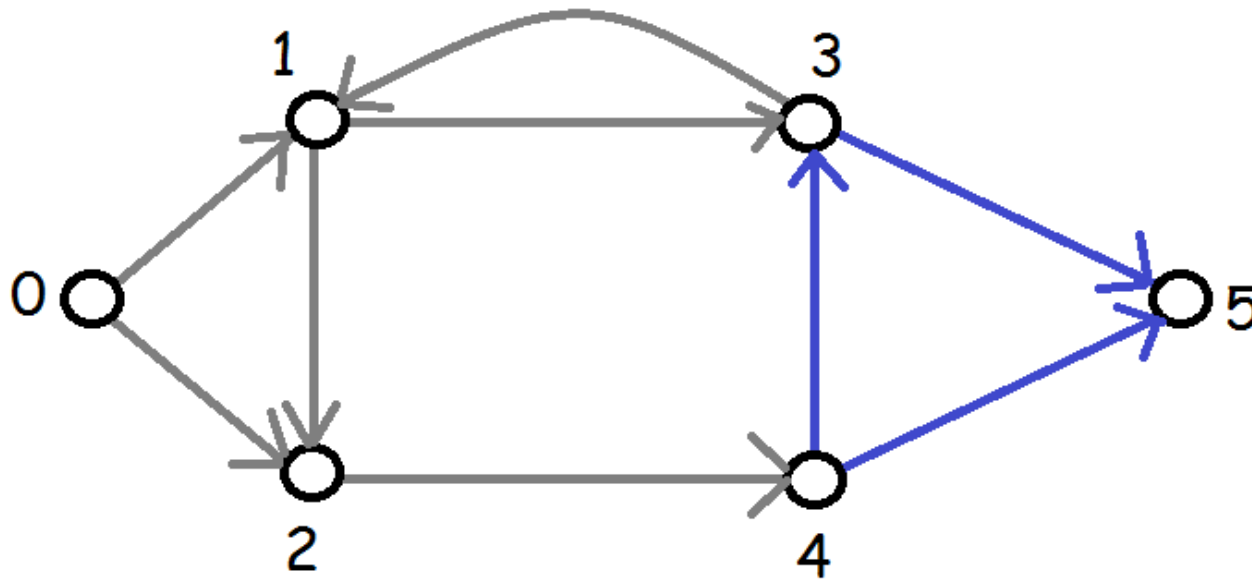


3, (3,5), 5, (4,5), 4, (4,3), 3



A *cycle of length 3* which is not a directed cycle (arcs can be traversed in either direction):

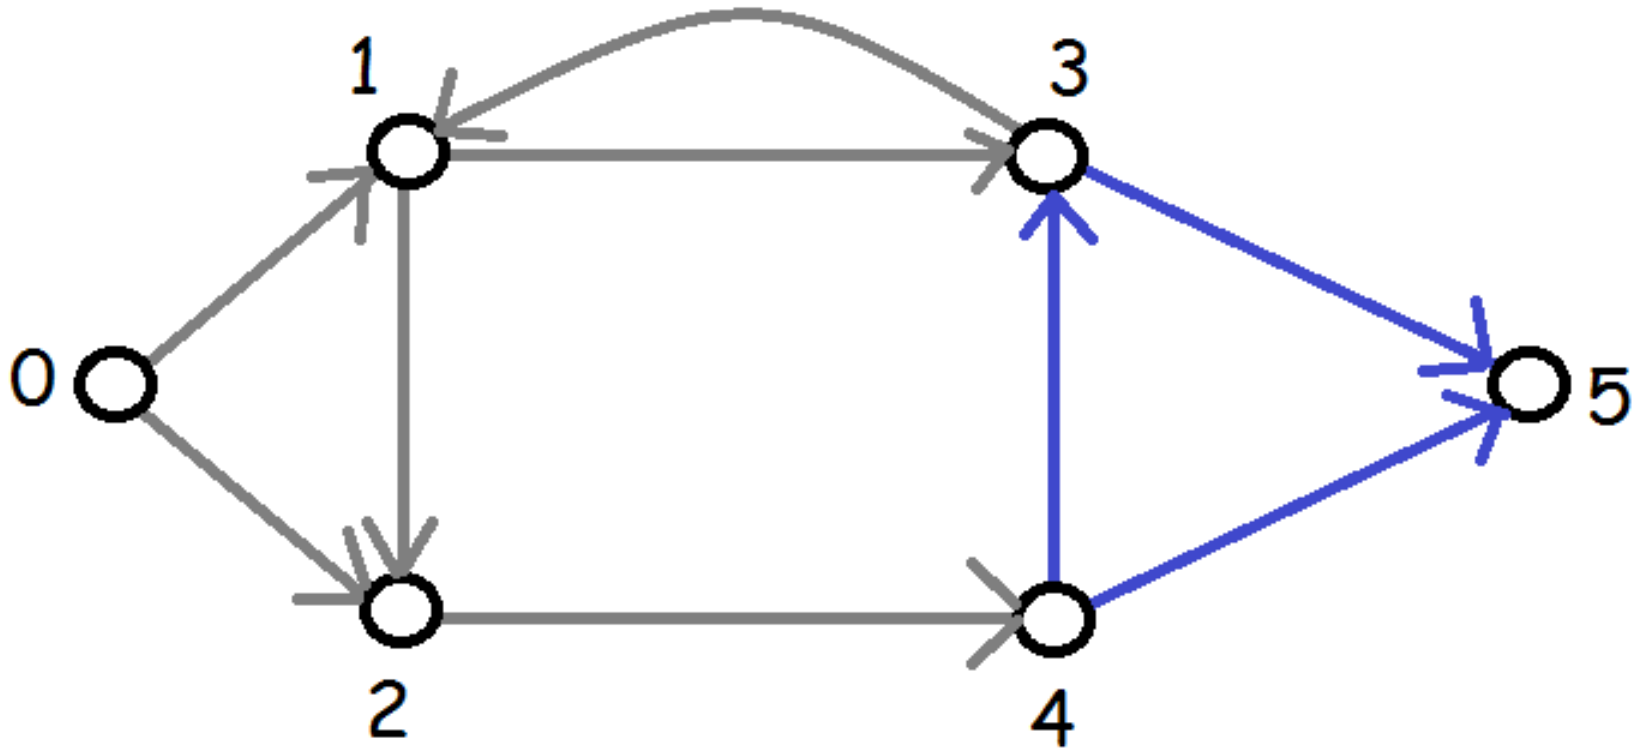


A directed path of length 4 from vertex 0 to vertex 5:

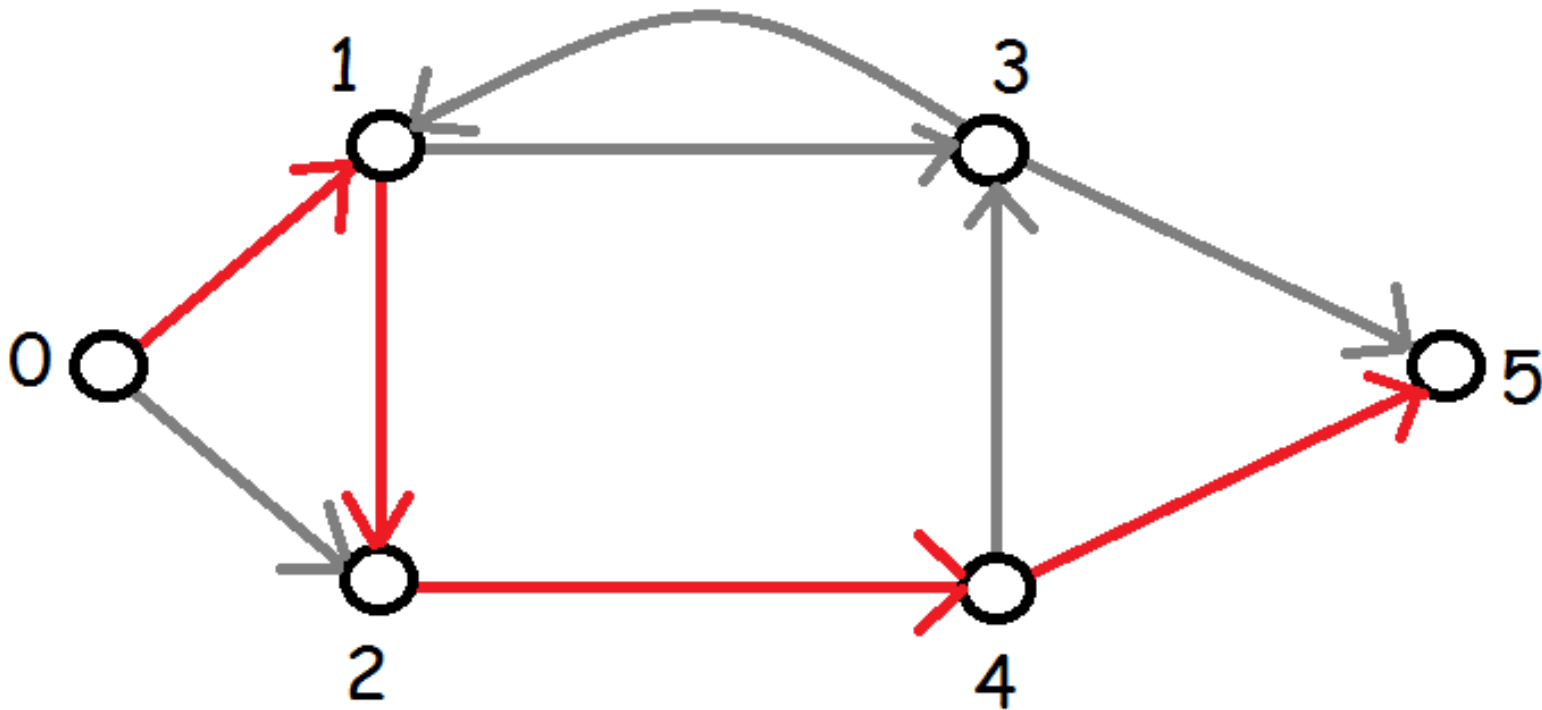

0, (0,1), 1, (1,2), 2, (2,4), 4, (4,5), 5


A **path** of **length 4** which is not a directed path (arcs can be traversed in either direction) from vertex 0 to vertex 5:

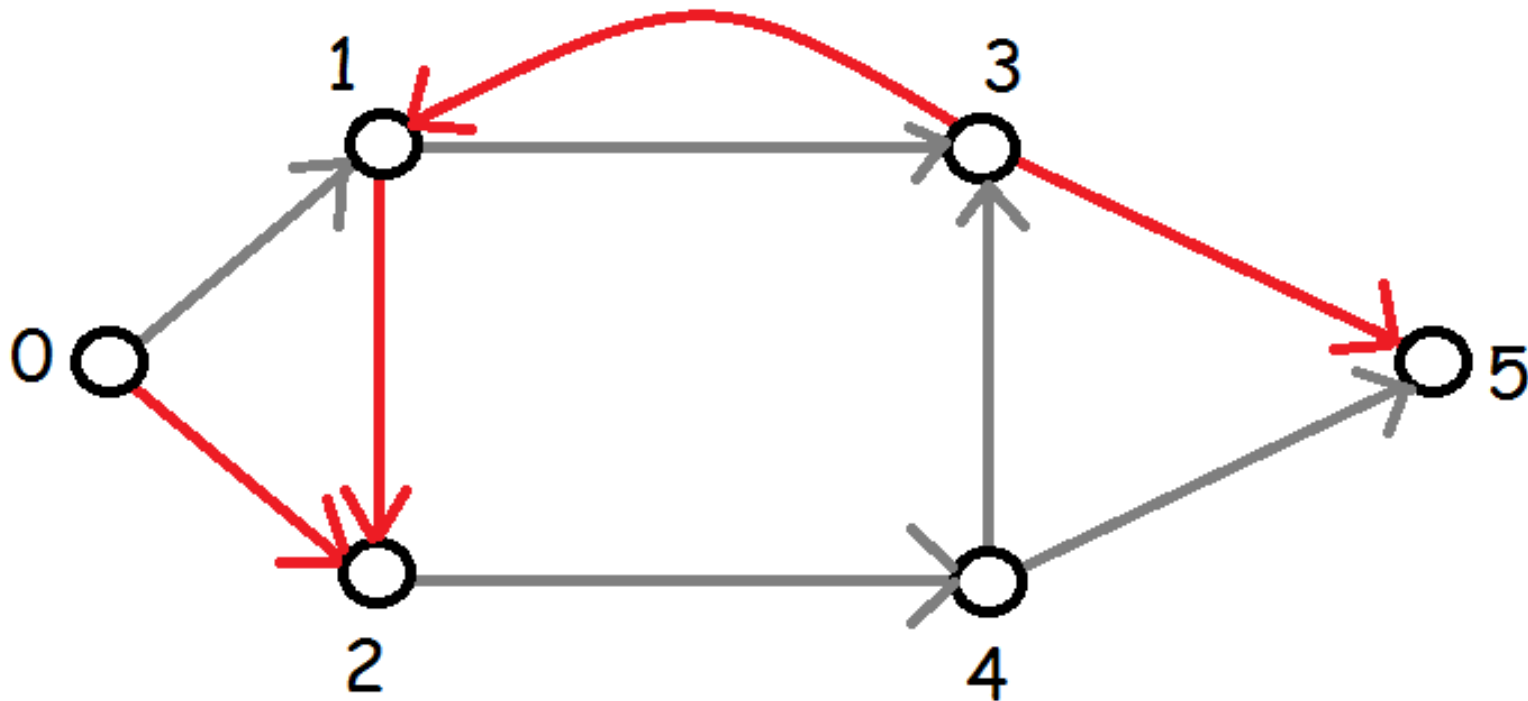


0, (0,2), 2, (1,2), 1, (3,1), 3, (3,5), 5

## The maximum flow problem:

Given a directed graph  $G$ , a source vertex  $s$  and a sink vertex  $t$  and a non-negative capacity  $c(u,v)$  for each arc  $(u,v)$ , find the maximum flow from  $s$  to  $t$ .

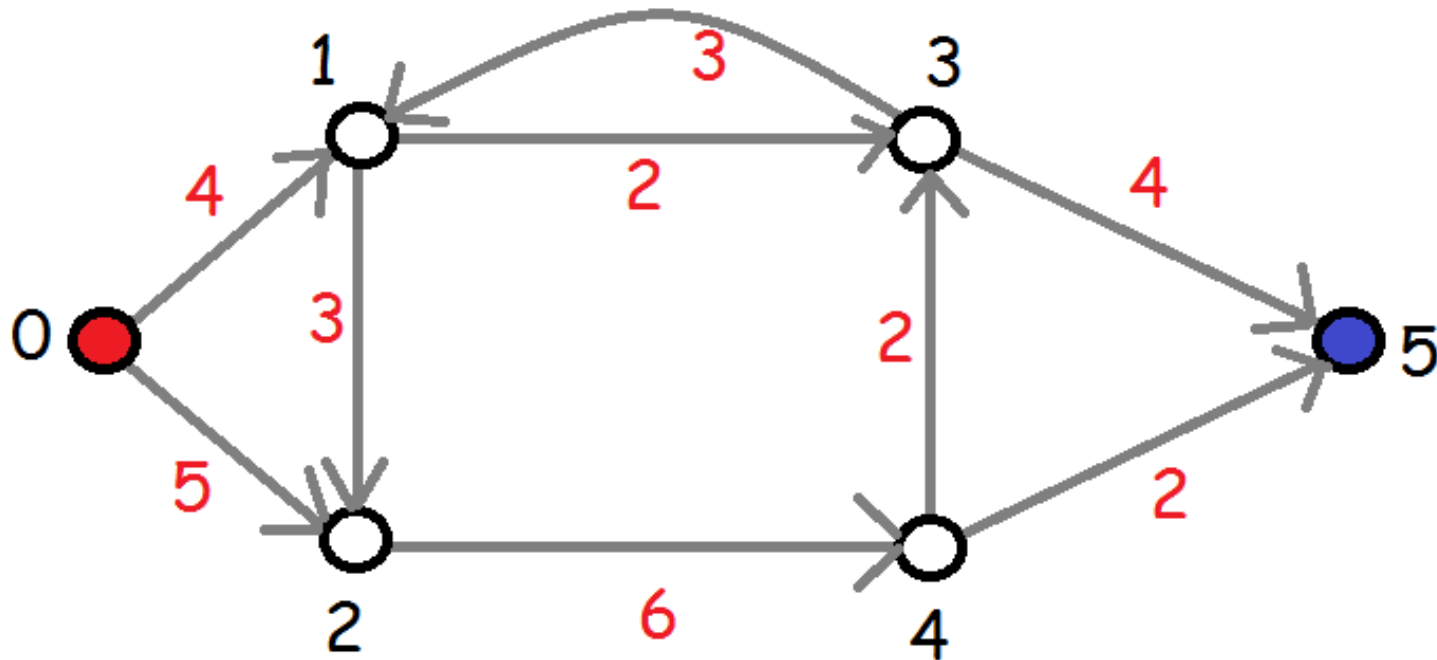


An example of a maximum flow:

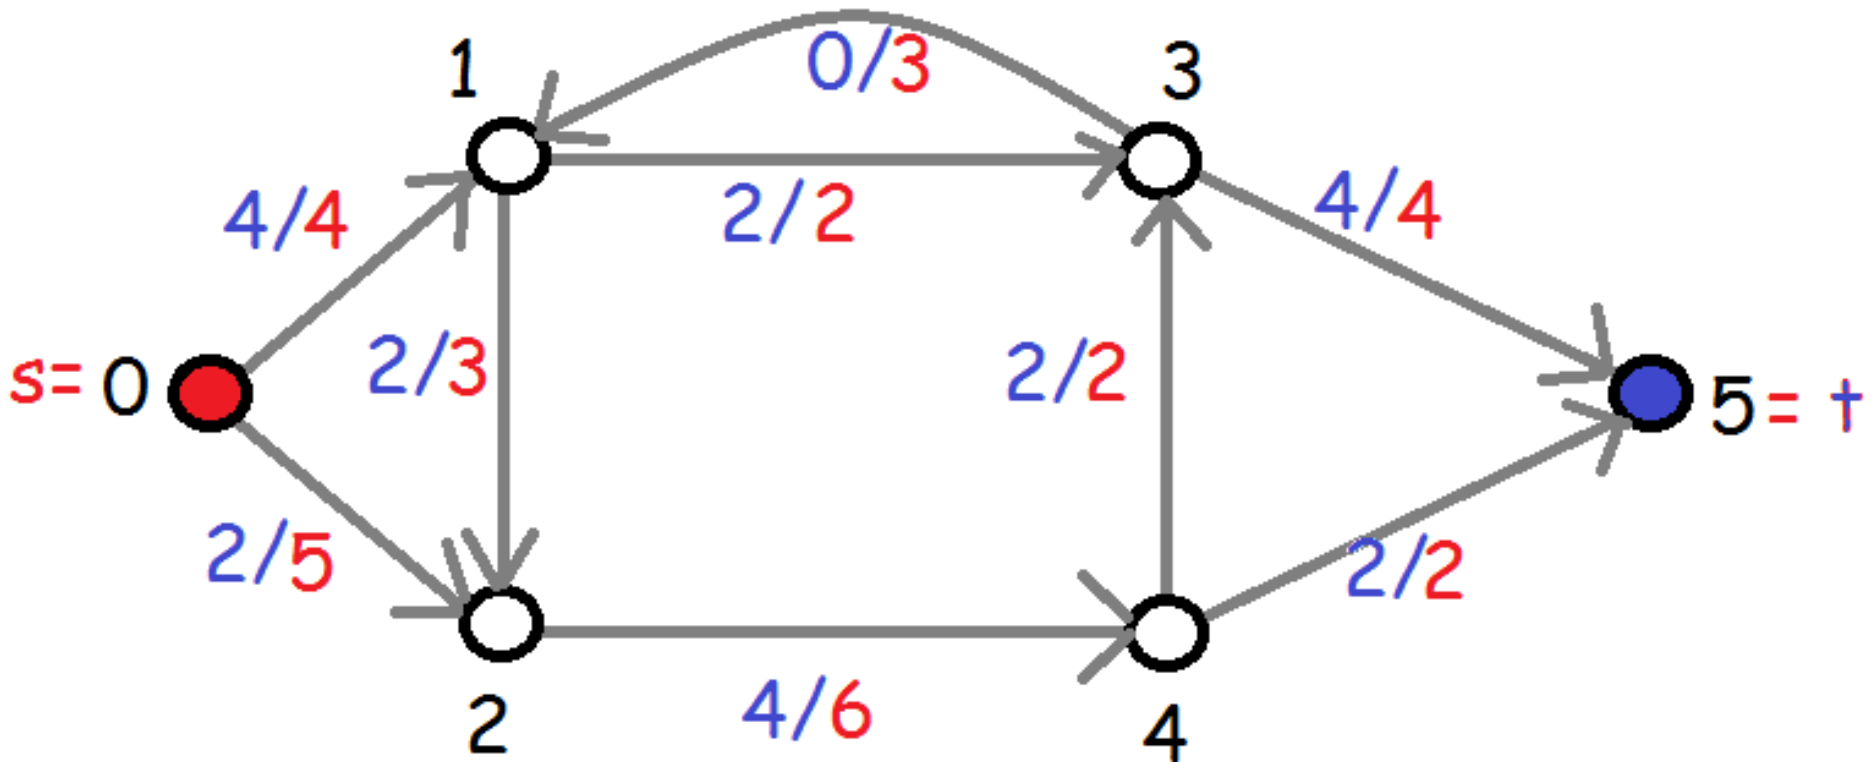


A **flow function**  $f$  is an assignment of flow values to the arcs of the graph satisfying:

1. For each arc  $(u,v)$ ,  $0 \leq f(u,v) \leq c(u,v)$ .
2. [Conservation of flow] For each vertex  $v$  except for  $s$  and  $t$ , the flow entering  $v$  equals the flow exiting  $v$ .

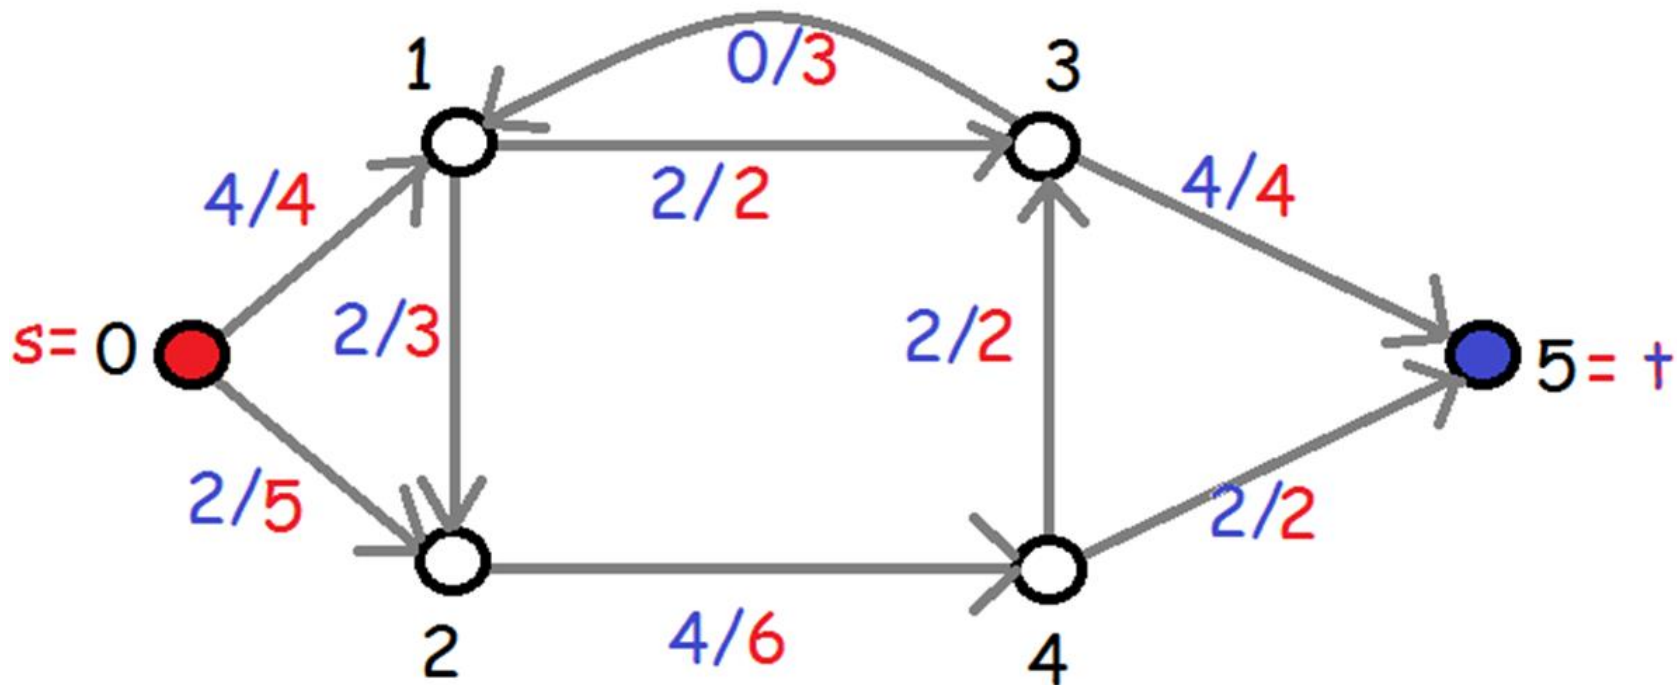


The amount of flow from  $s$  to  $t$  is equal to the net amount of flow exiting  $s$   
= sum over arcs  $e$  that exit  $s$  of  $f(e)$  -  
sum over arcs  $e$  that enter  $s$  of  $f(e)$ .

Flow = 6.

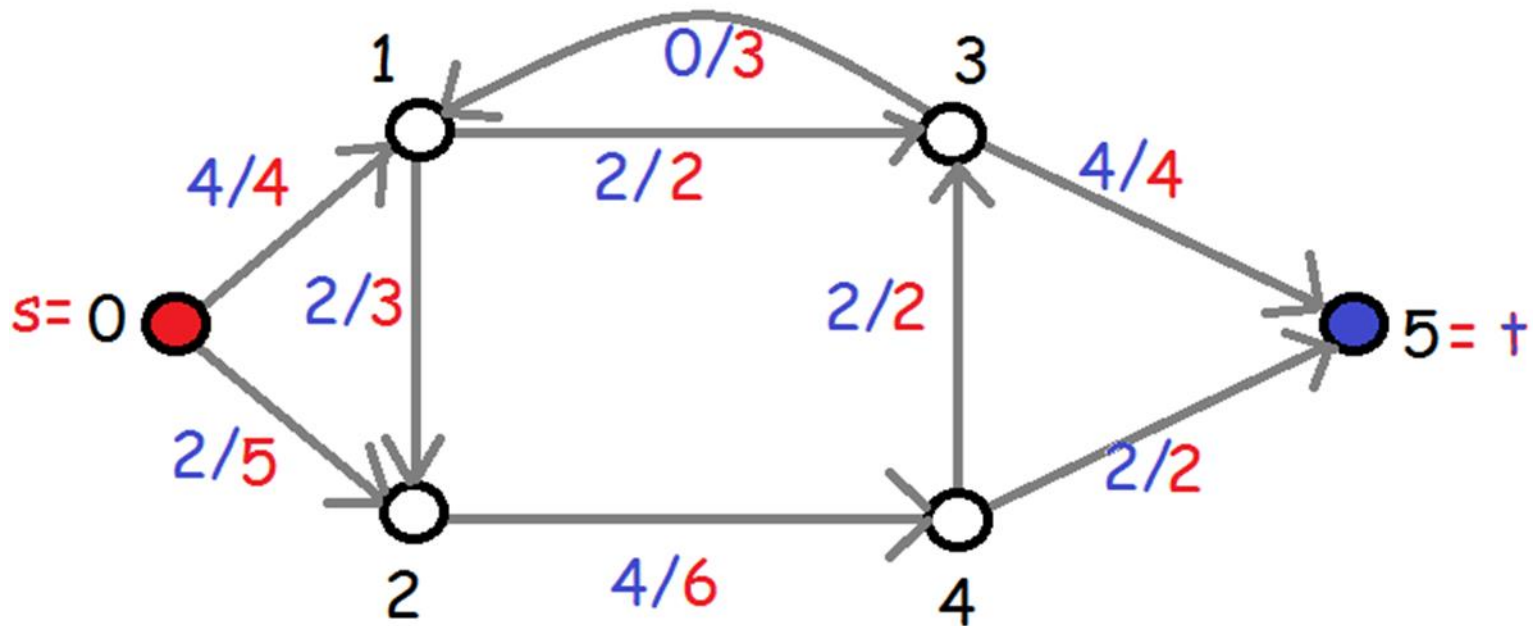


A slightly different example:

$$\text{Flow} = 4 + 4 - 2 = 6.$$

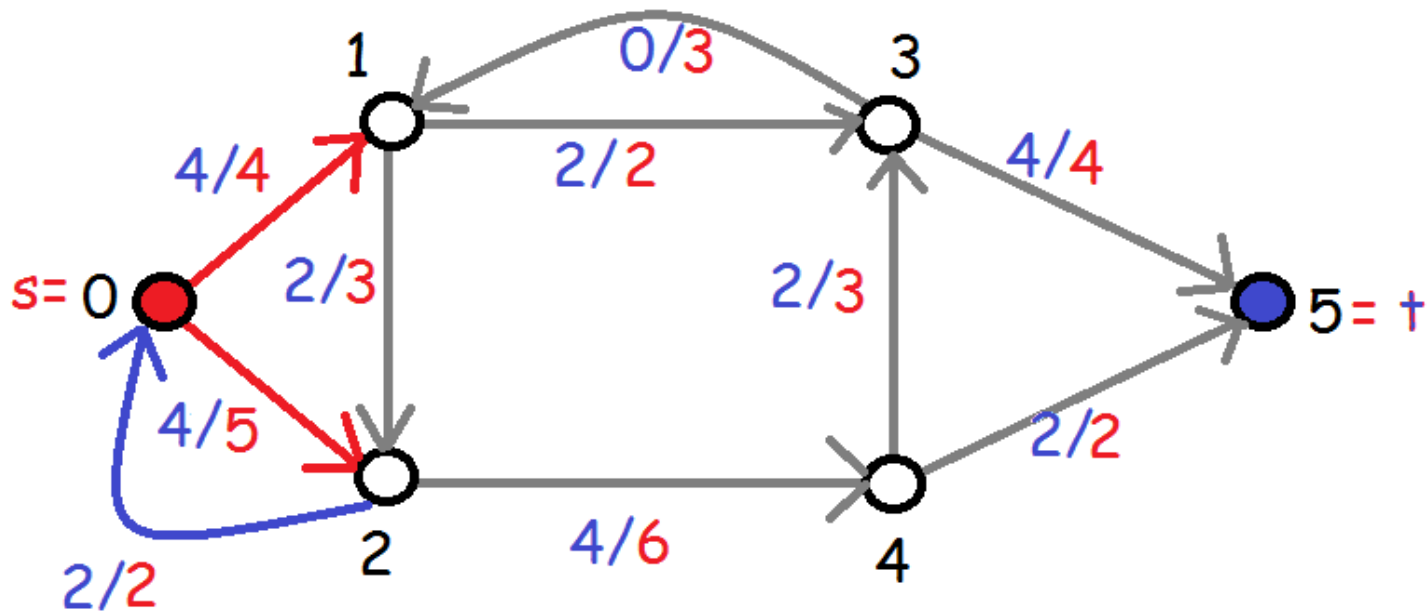



Because of conservation of flow,  
the amount of flow from  $s$  to  $t$  is also equal to  
the net amount of flow entering  $t$ .

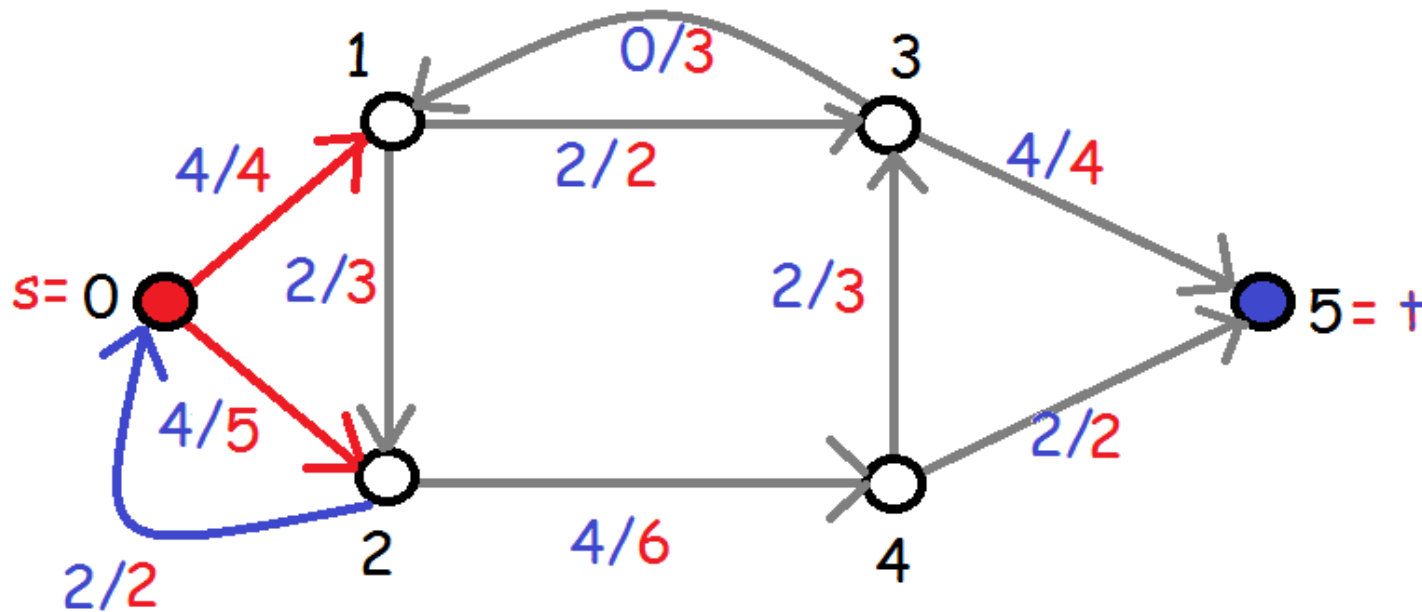


Form an auxillary graph as follows:

For each arc  $(u,v)$  of  $G$ :


1. Add an arc  $(u,v)$  with capacity  $c(u, v) - f(u,v)$ .
2. Add an arc  $(v,u)$  with capacity  $f(u,v)$ .




Auxillary graph:

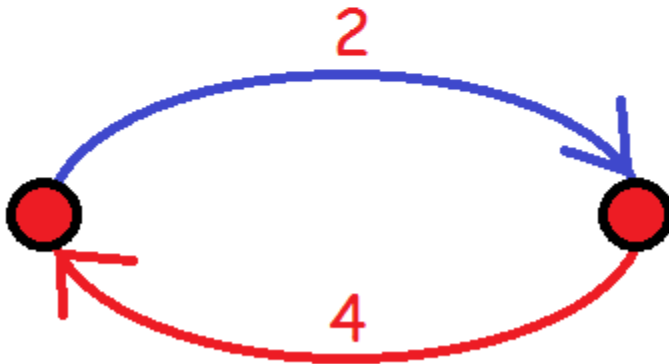

Make the auxillary graph for this example:

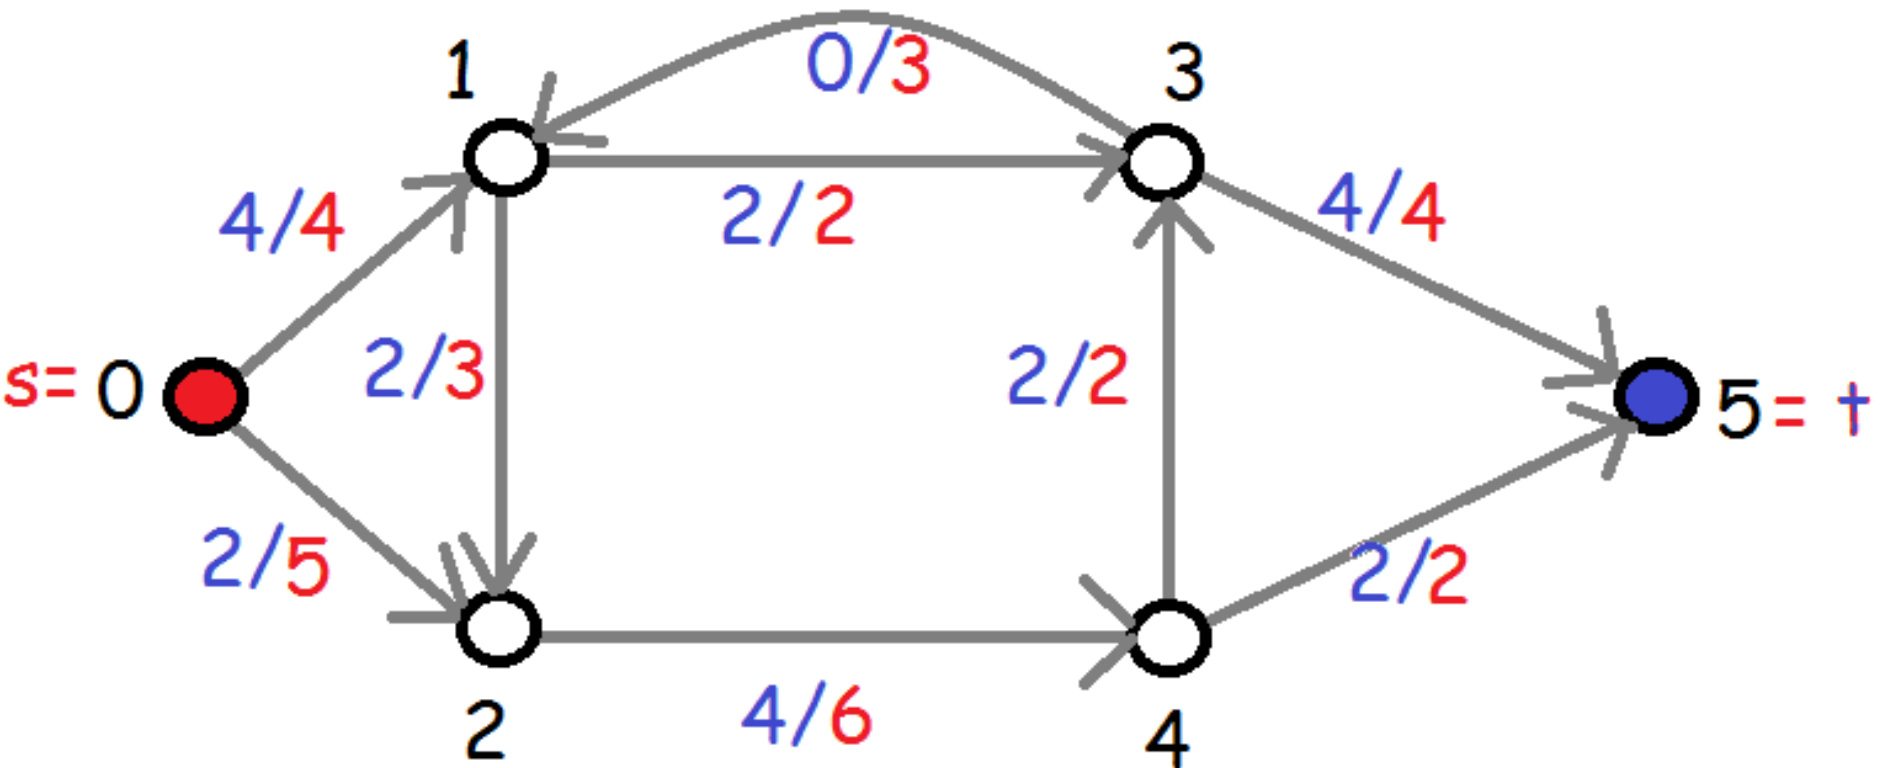


1. Create the auxillary graph for this flow.
2. Apply BFS to find the set of vertices reachable from  $s$  in the auxillary graph.
3. Which arcs are in the corresponding cut?

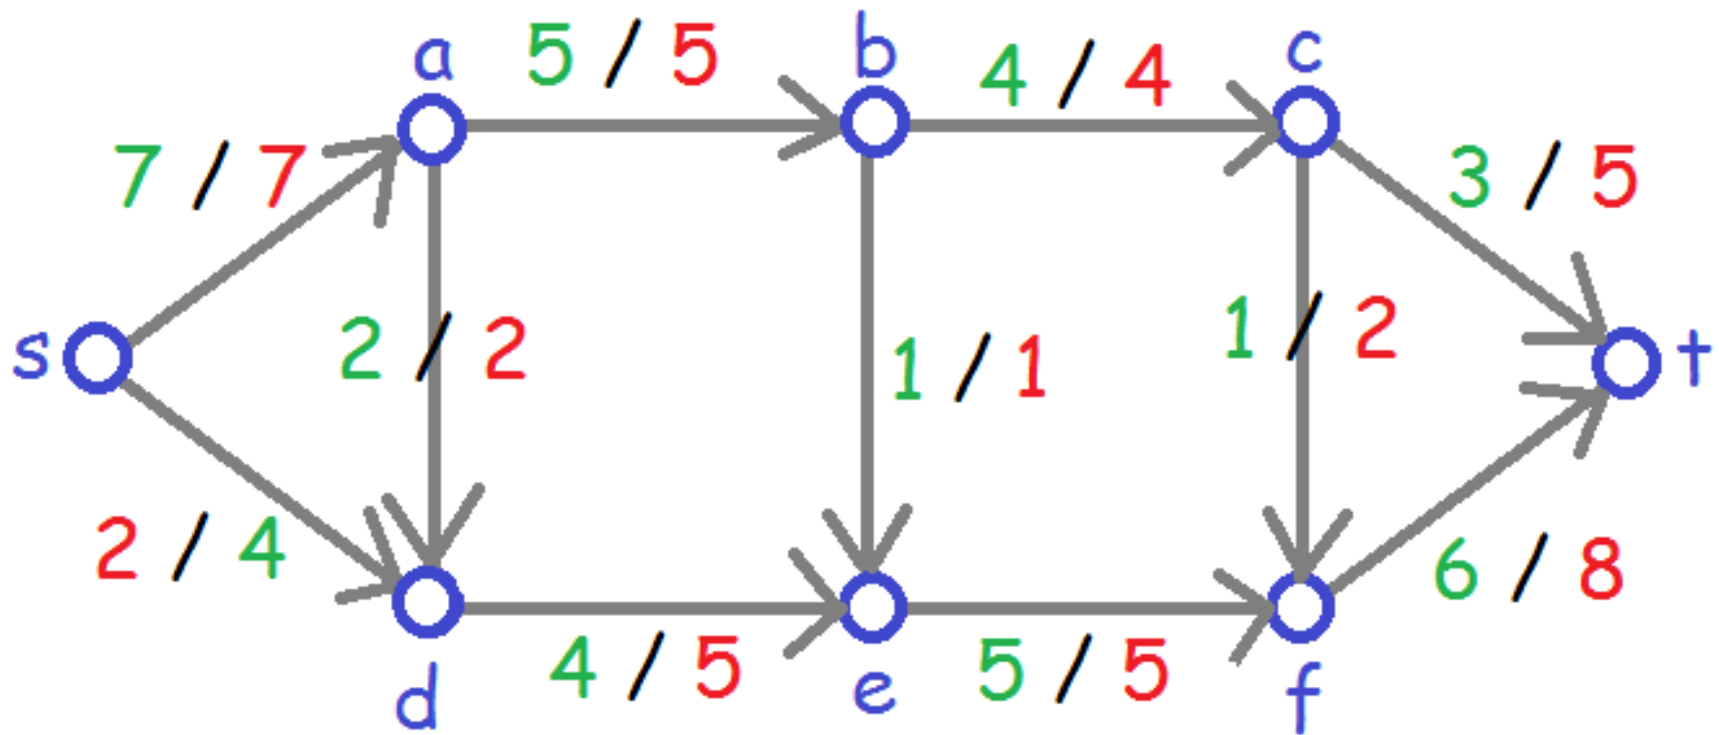

When the flow is maximum:

$S = \{v: v \text{ is reachable from } s \text{ on a directed path of non-zero weighted arc } s\}$

$T = V - S$ . Then  $(S, T)$  is a minimum capacity  $s, t$ -cut of the graph.

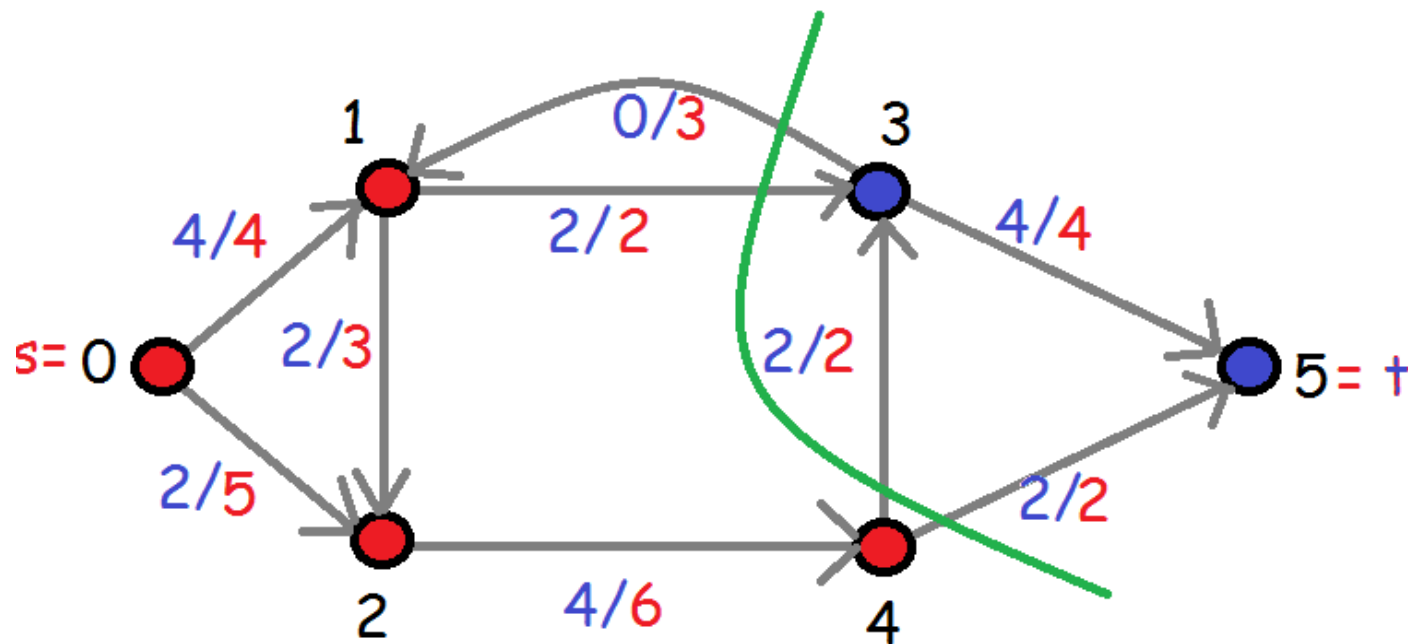


$S = \{0, 1, 2, 4\}$ ,  $T = \{3, 5\}$

$(S, T) = \{(u, v) : u \in S \text{ and } v \in T\}$ .

$(S, T) = \{(1, 3), (4, 3), (4, 5)\}$


This is a cut because if you remove these edges there are no directed paths anymore from  $s$  to  $t$ .

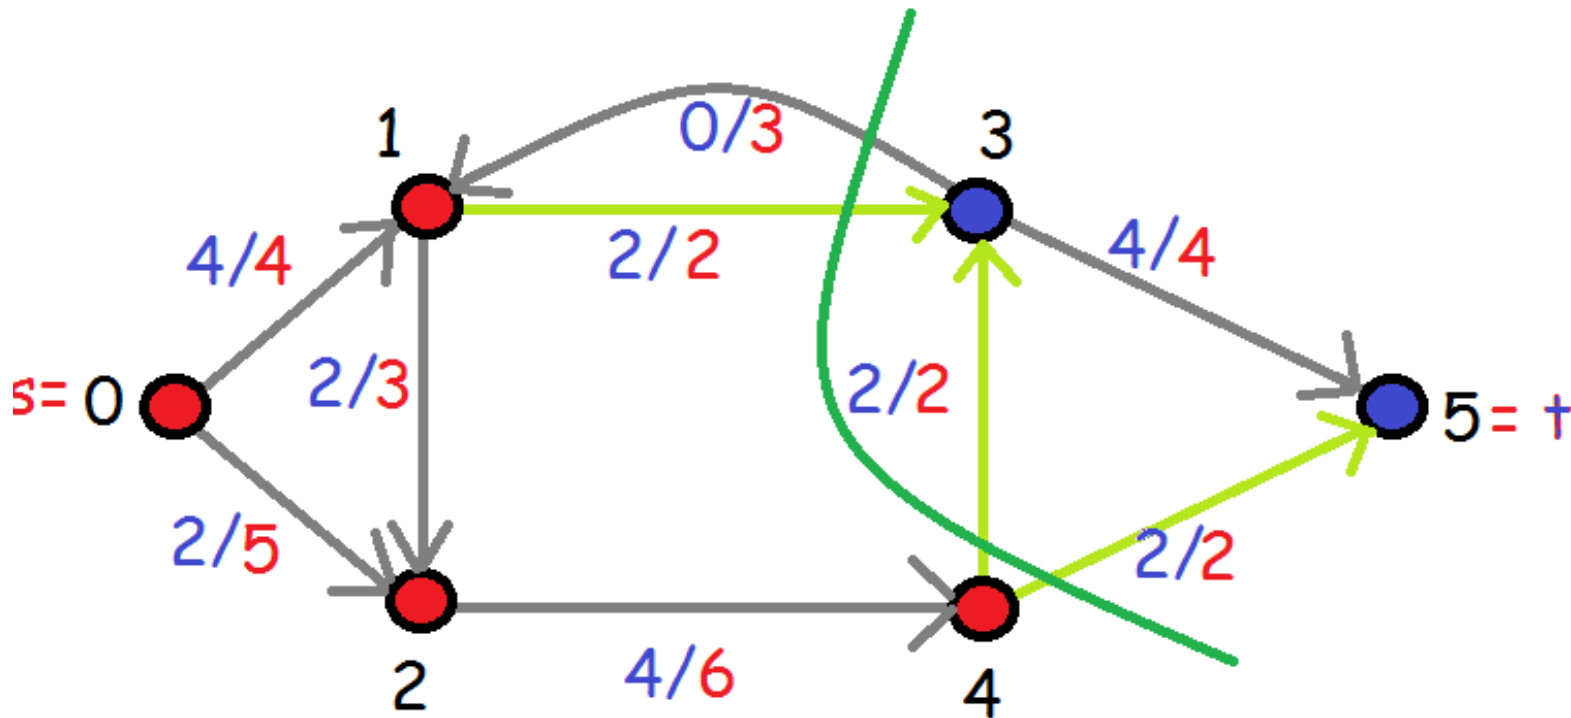

The **capacity** of a cut  $(S,T)$  is the sum of the capacities of the arcs in the cut.

$(S,T) = \{(1,3), (4,3), (4,5)\}$


$\text{Capacity}(S,T) = 2 + 2 + 2 = 6.$

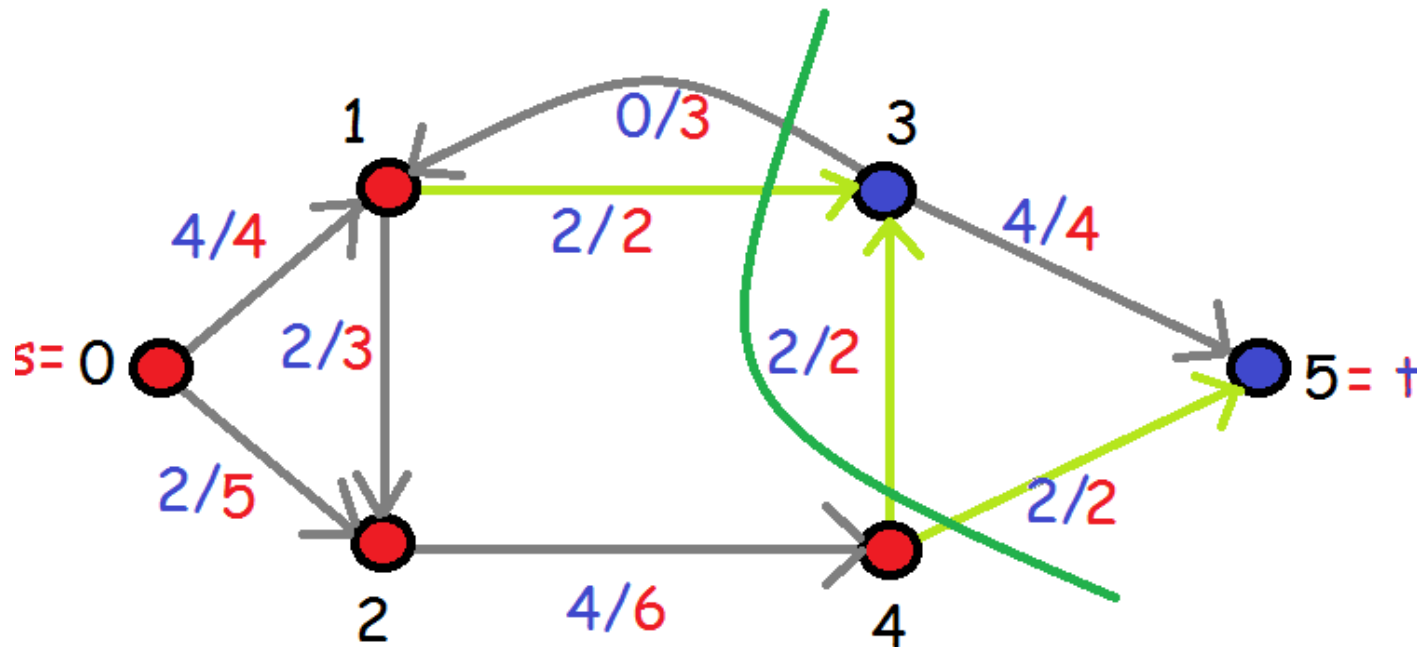

The maximum flow from  $s$  to  $t$  cannot be more than the capacity of any of the  $s,t$ -cuts.

**Theorem: the maximum flow equals the minimum capacity of an  $s,t$ -cut.**


How can we find a maximum flow?

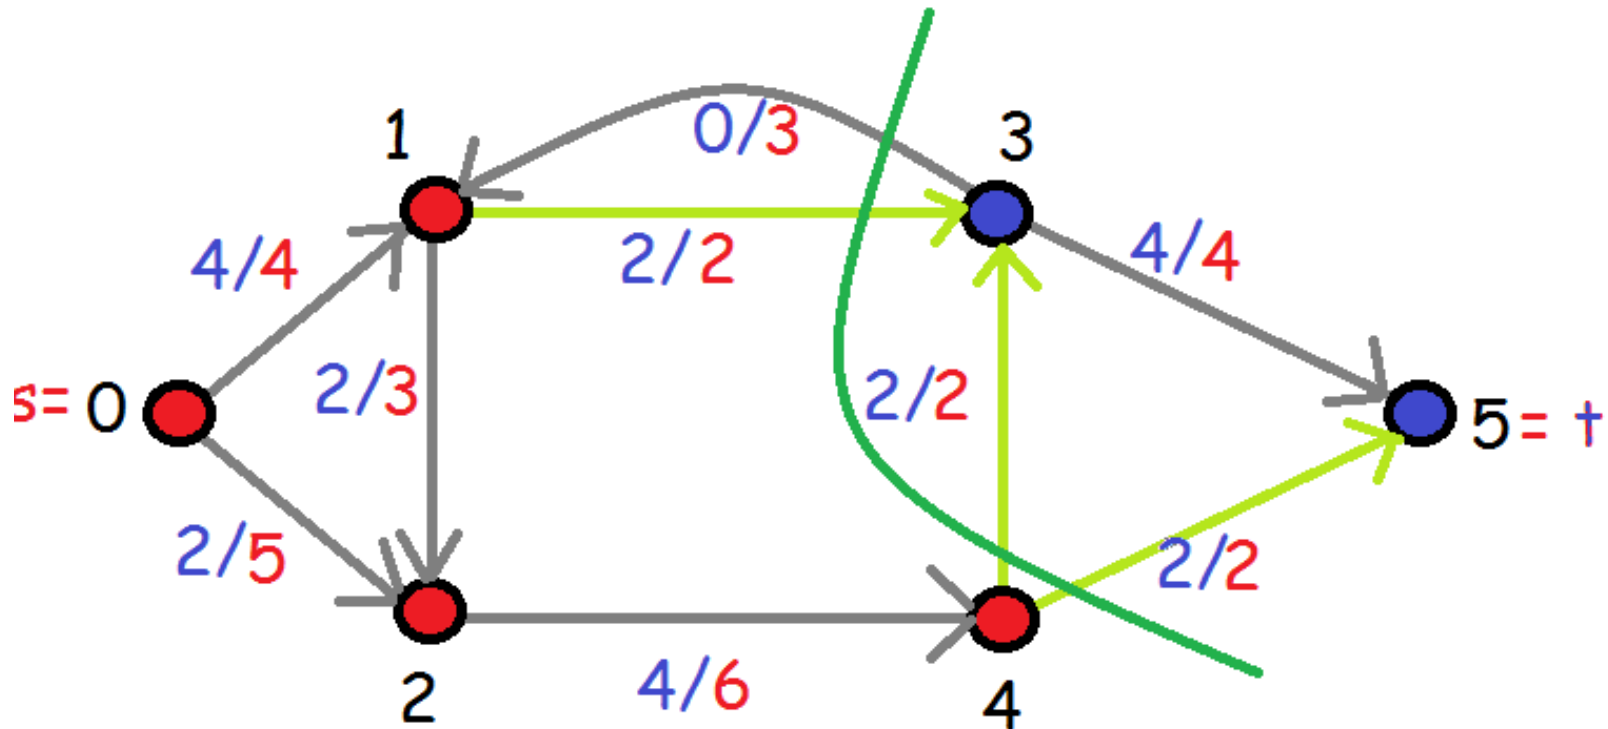



Use the Edmonds-Karp Algorithm to find the maximum flow in this network.

Edmonds-Karp: Use BFS to find augmenting paths in the auxiliary graph.

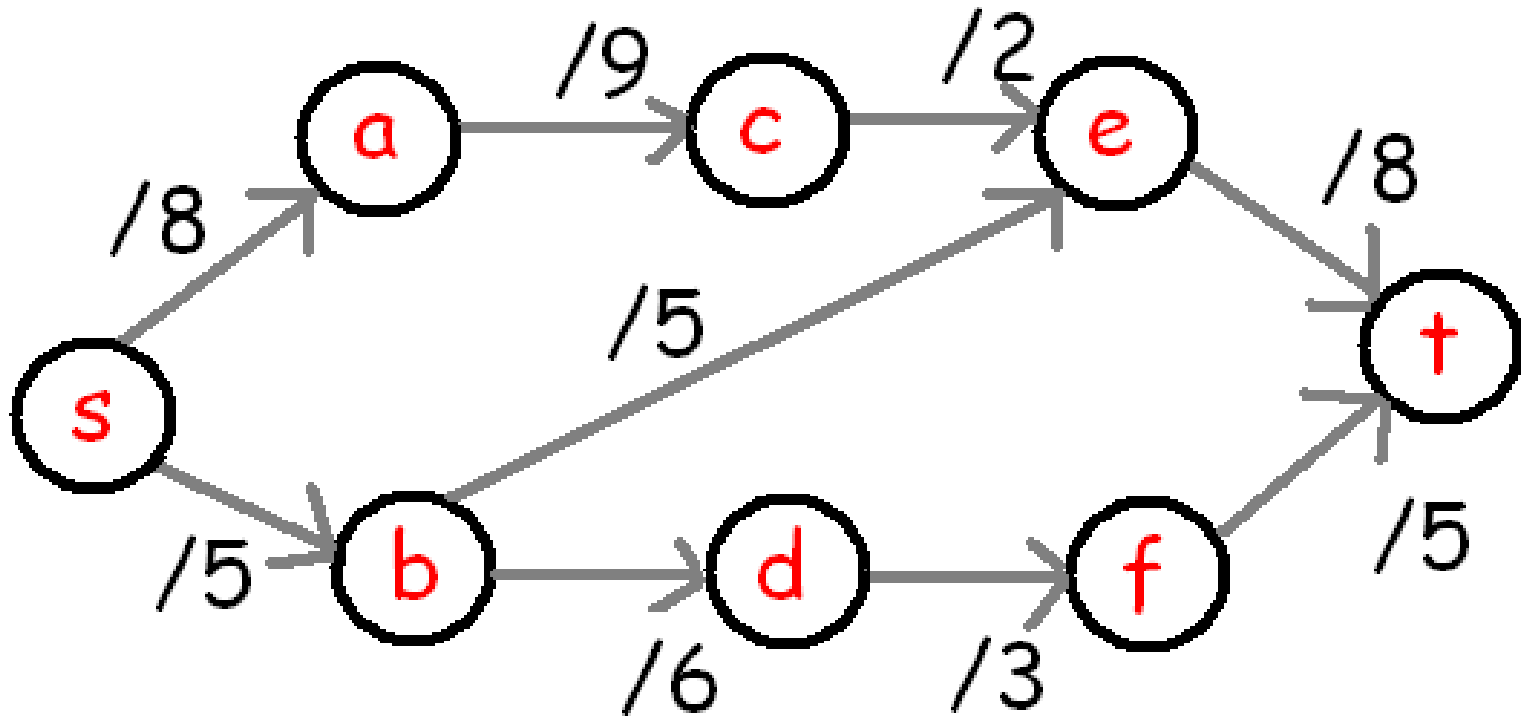



Jack  
Edmonds





Richard Karp




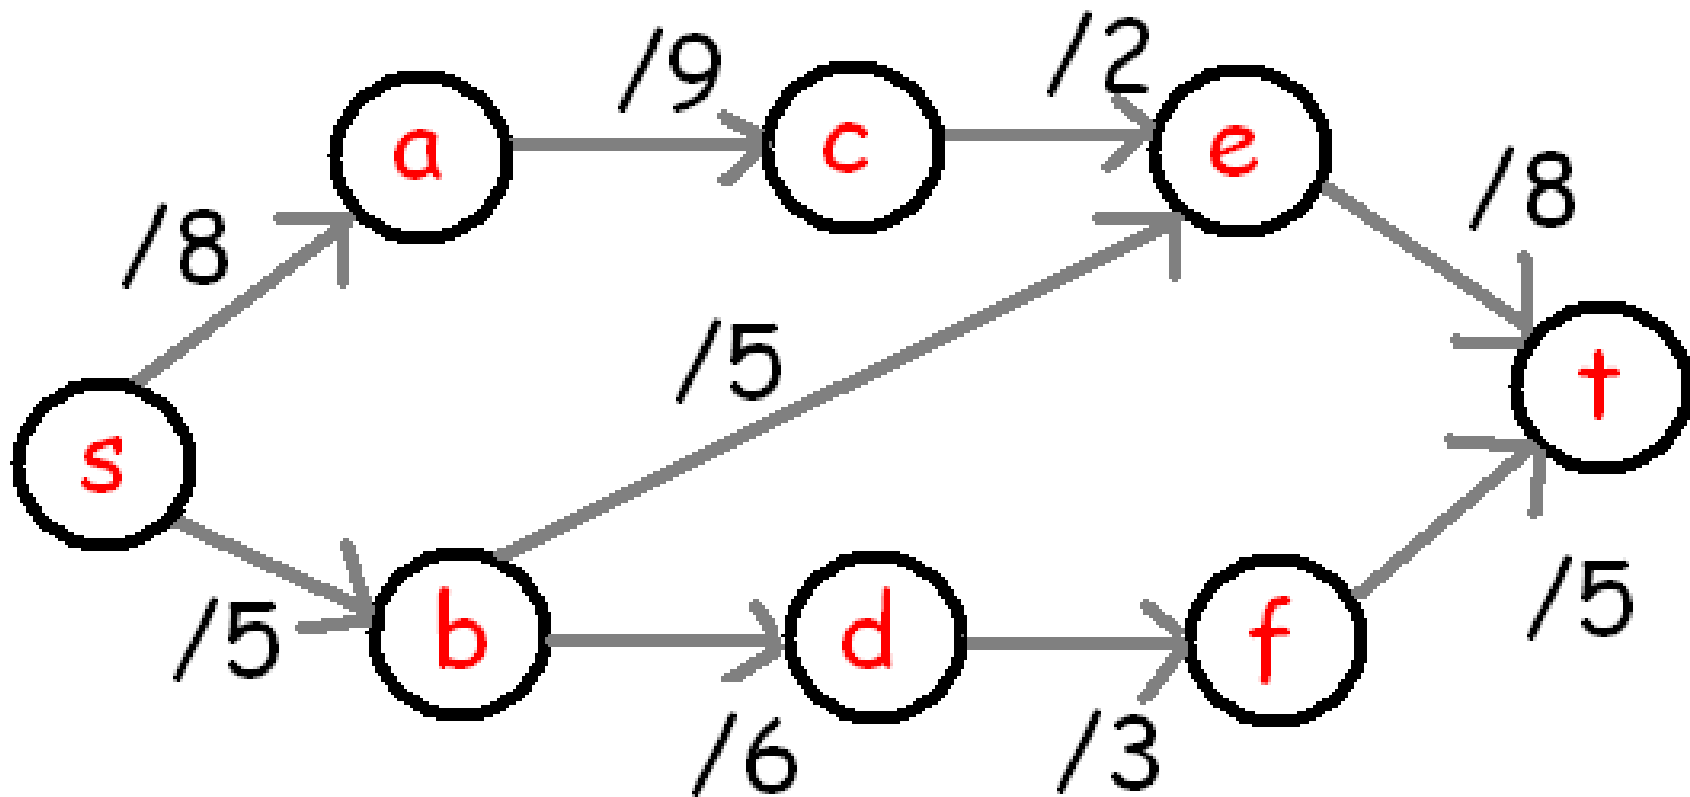


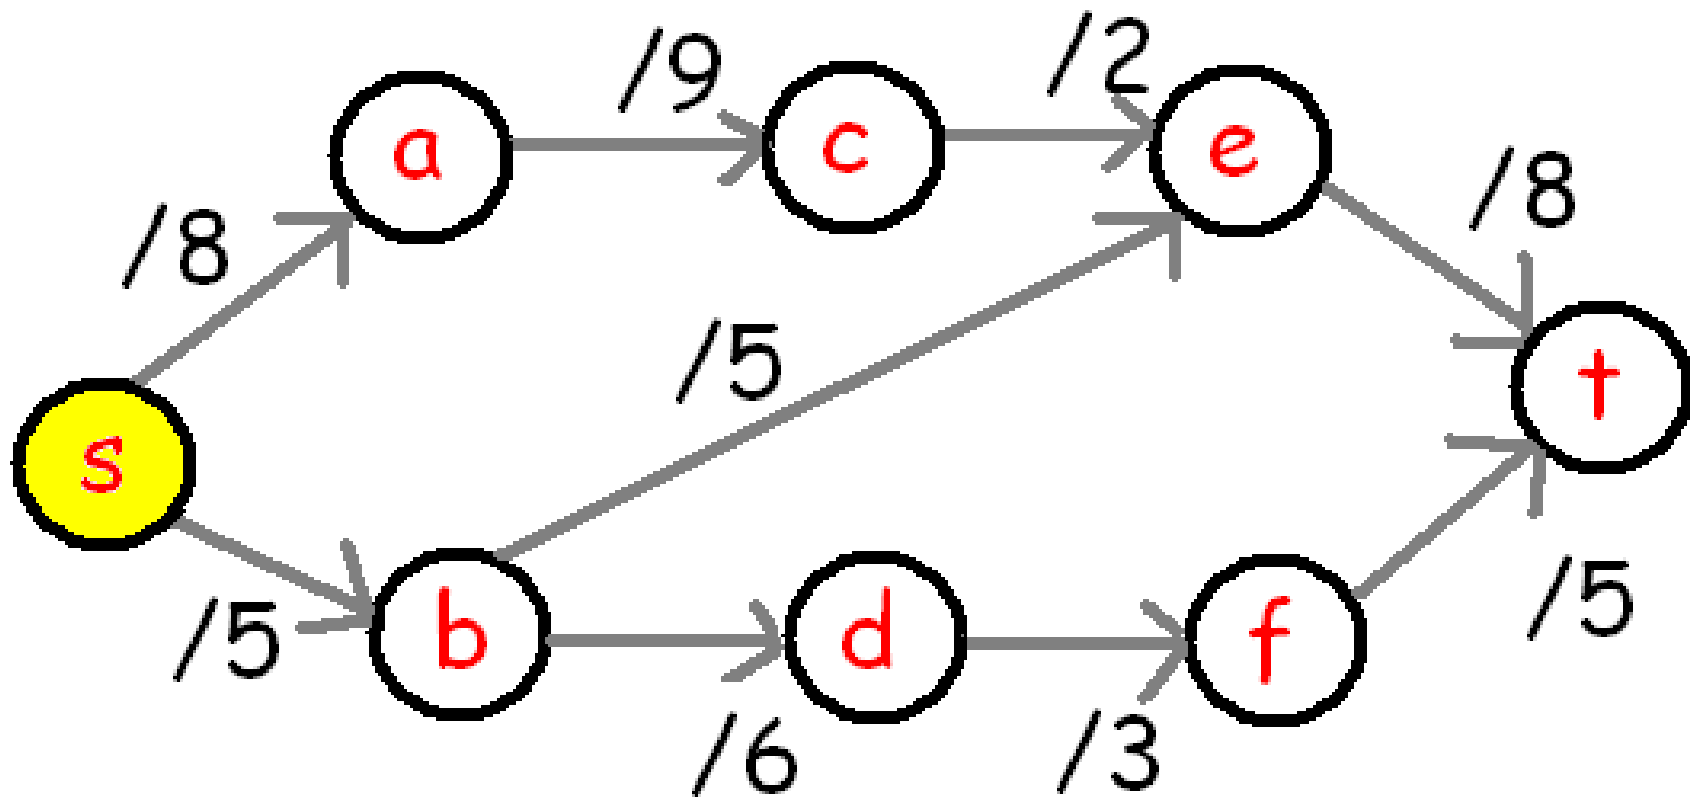

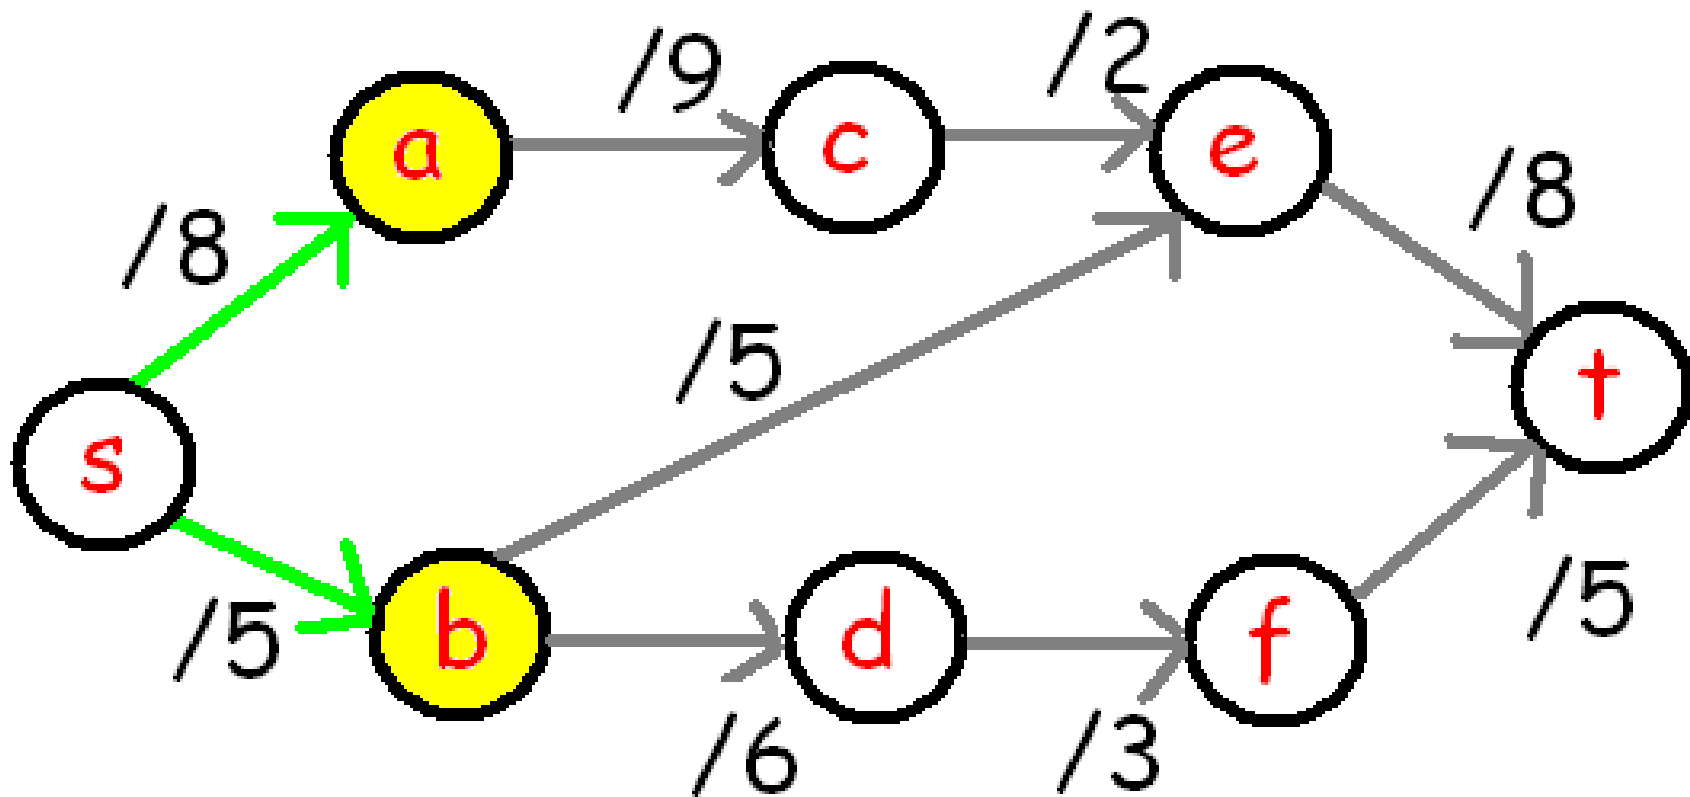

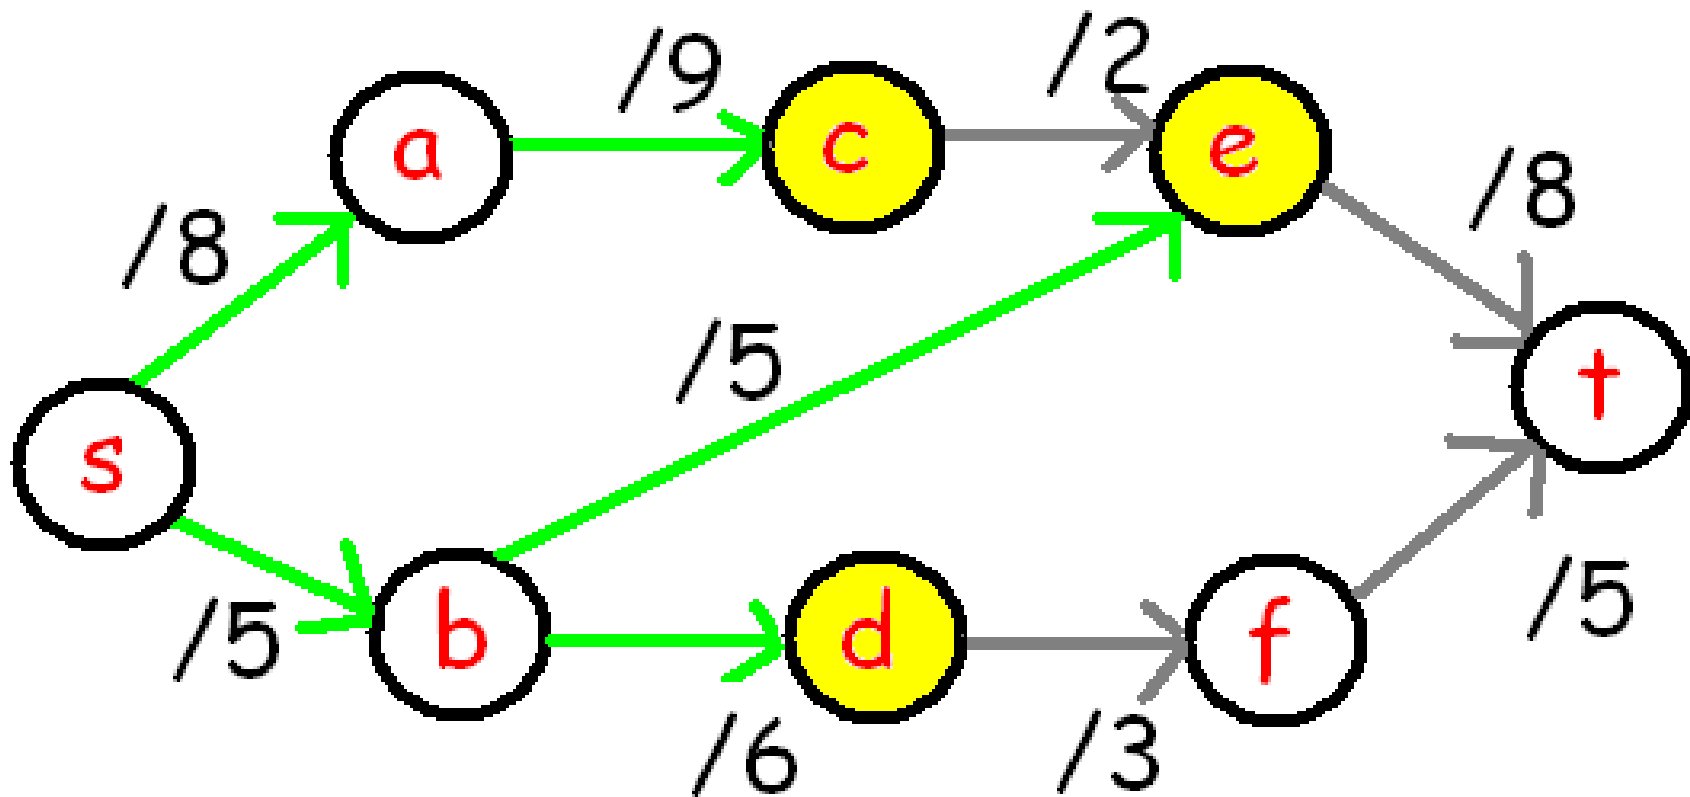


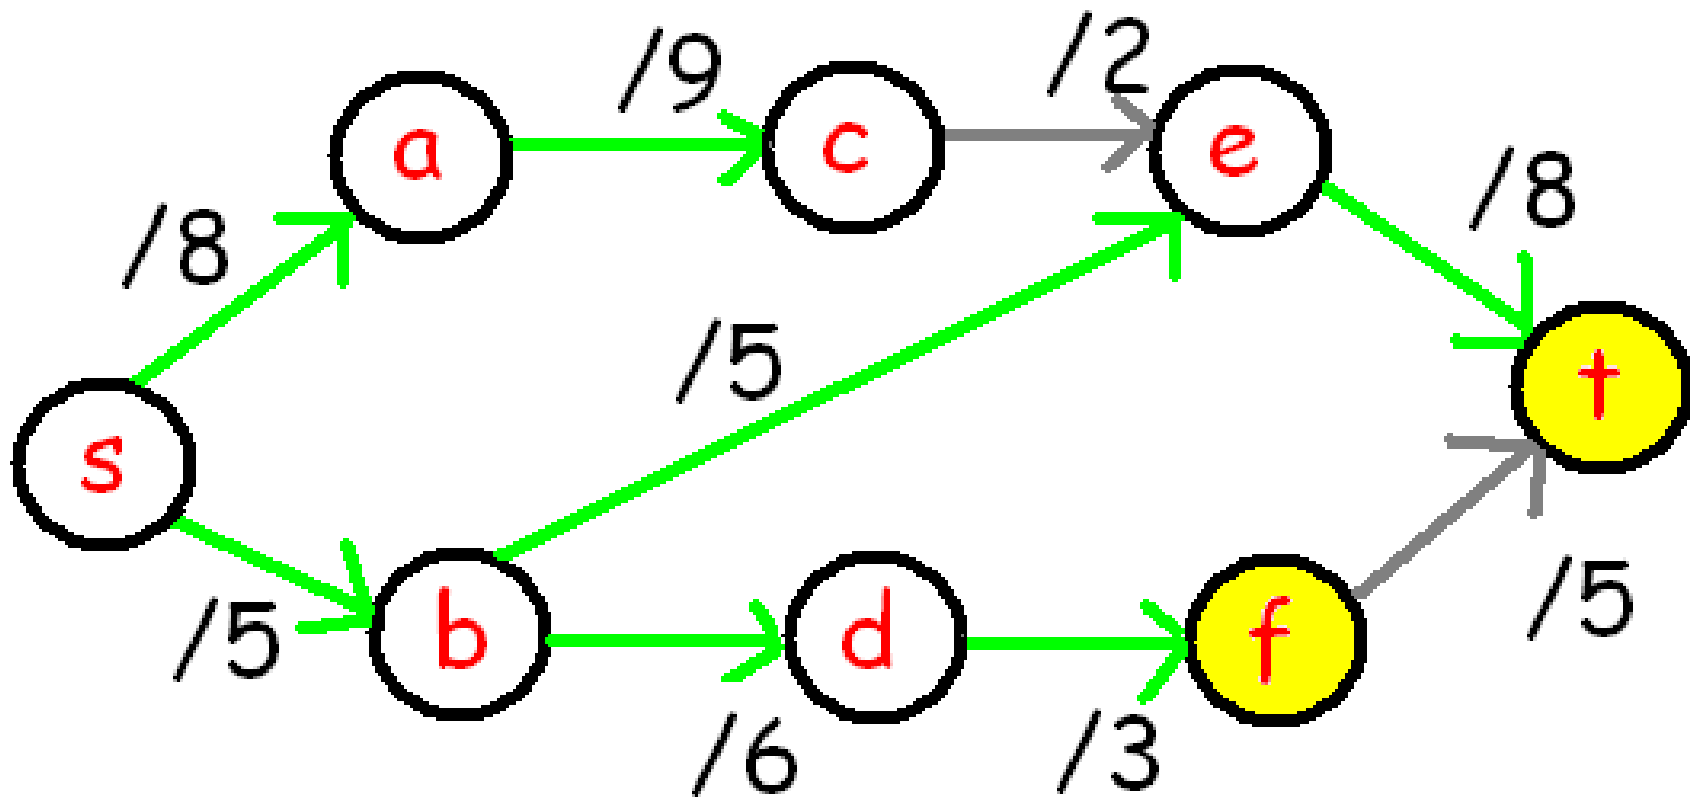

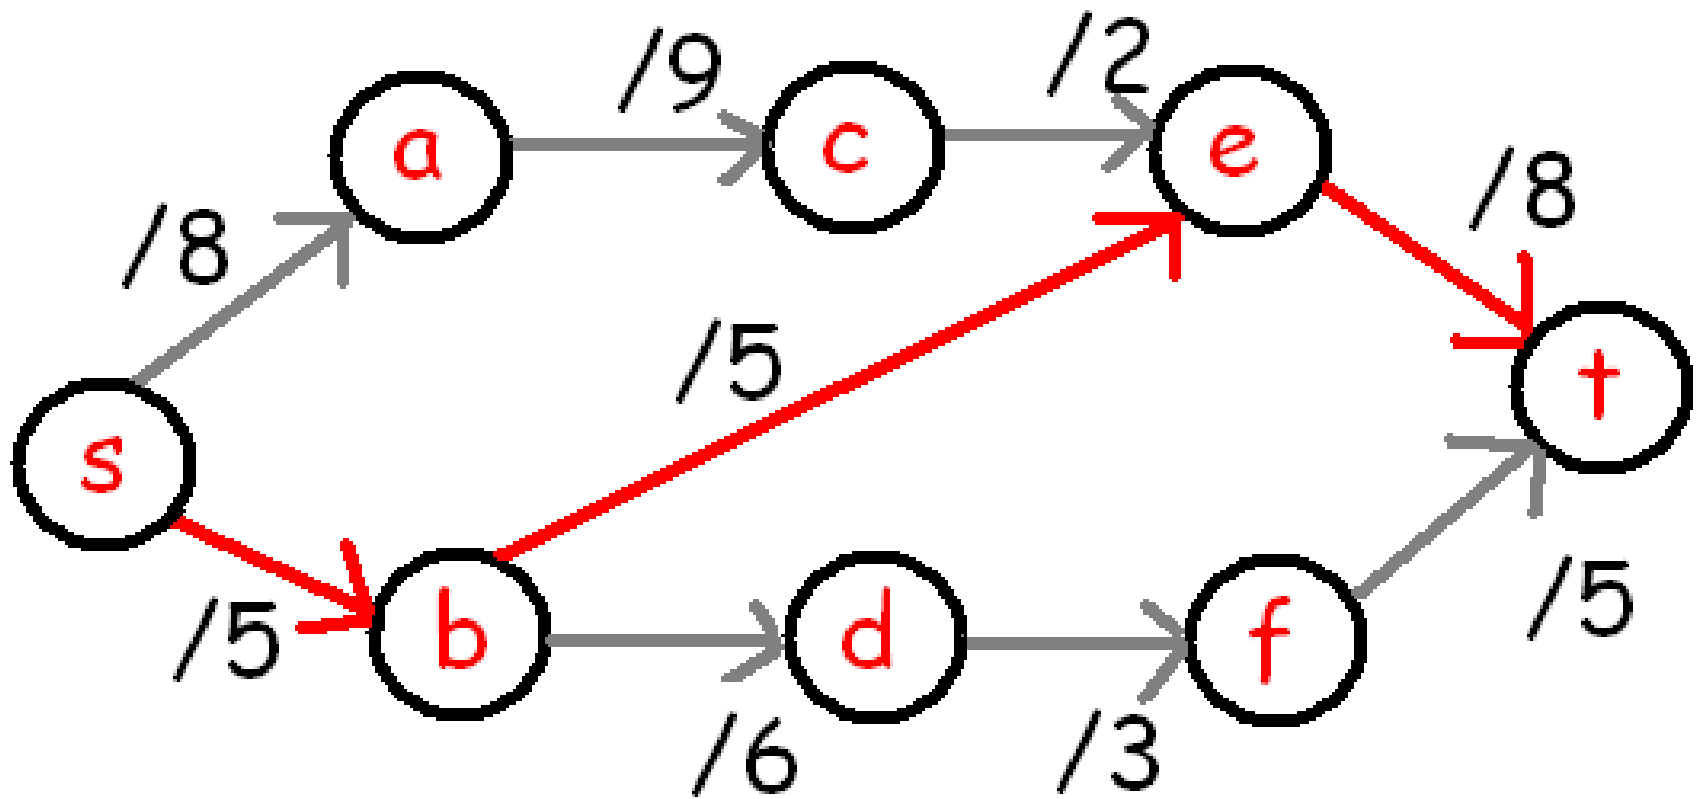


Augmenting path:  $s, b, e, t$




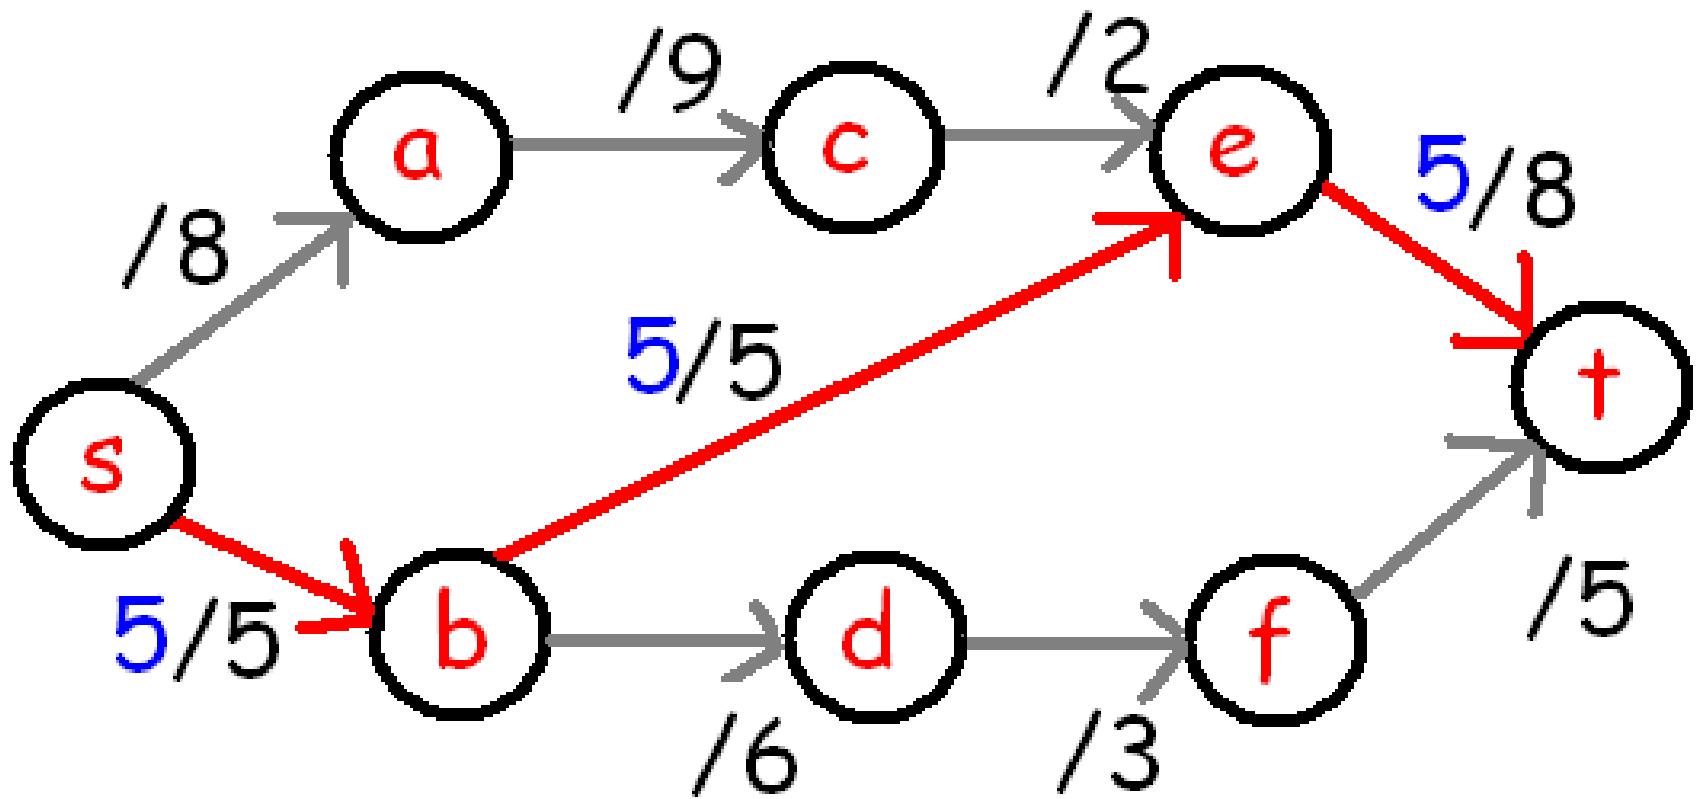


Send 5 units of flow along augmenting path.

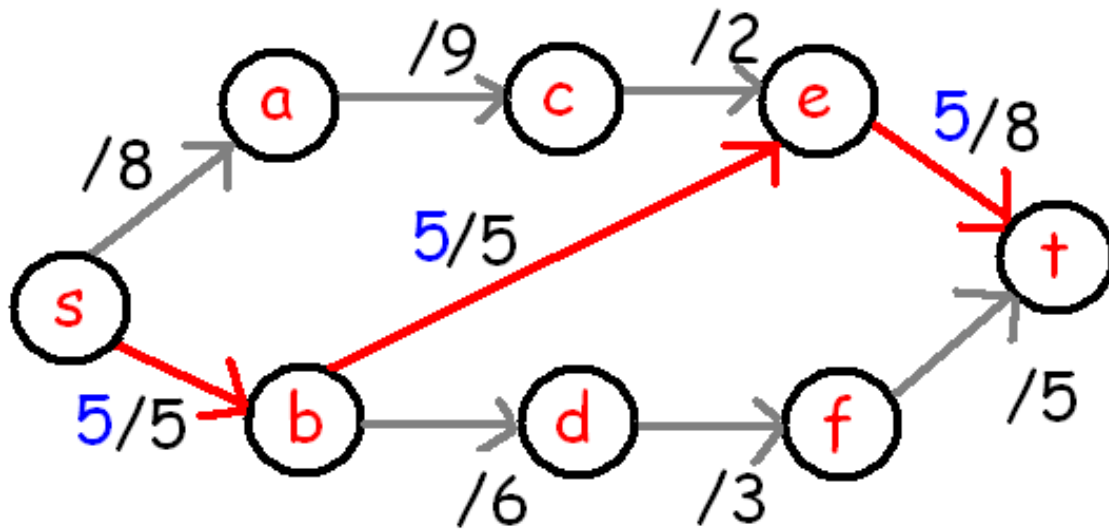


Create new auxiliary graph:

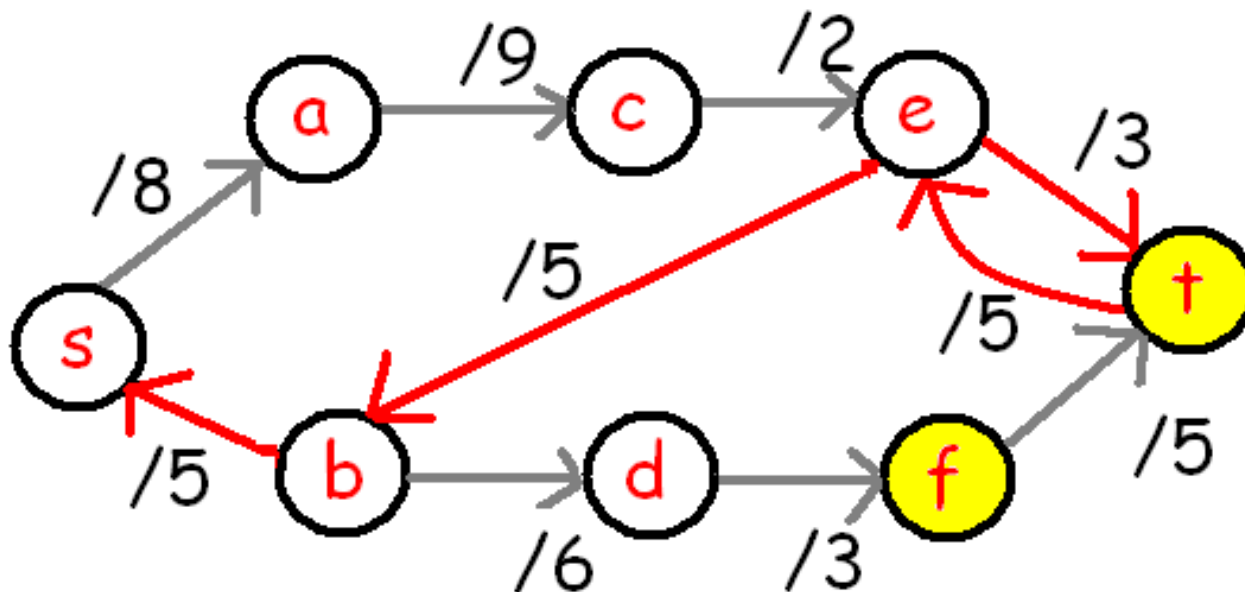

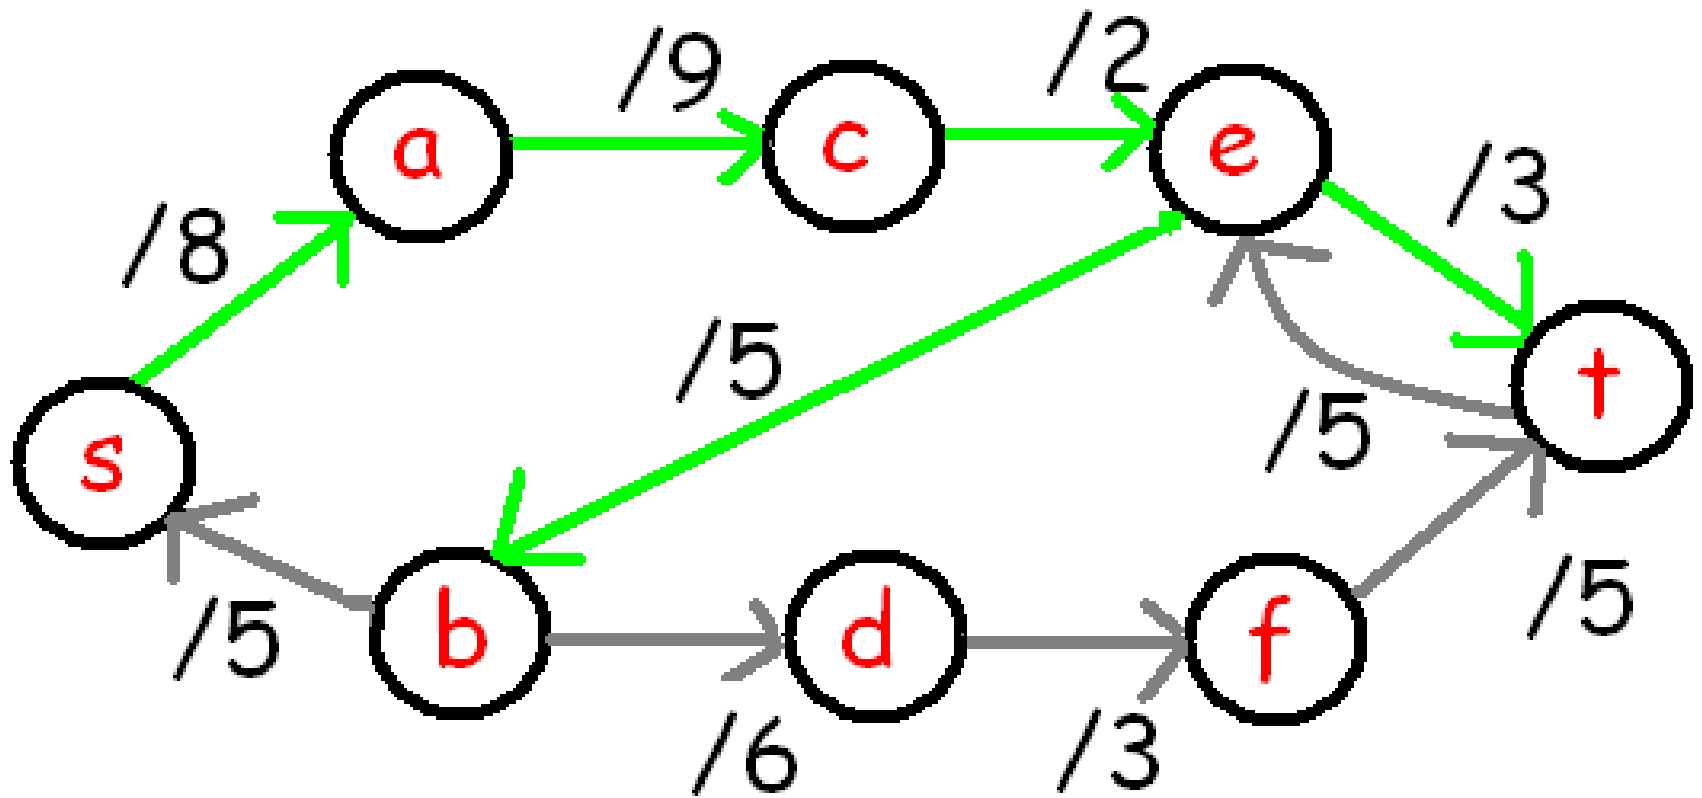


Do BFS starting at  $s$  of auxillary graph.

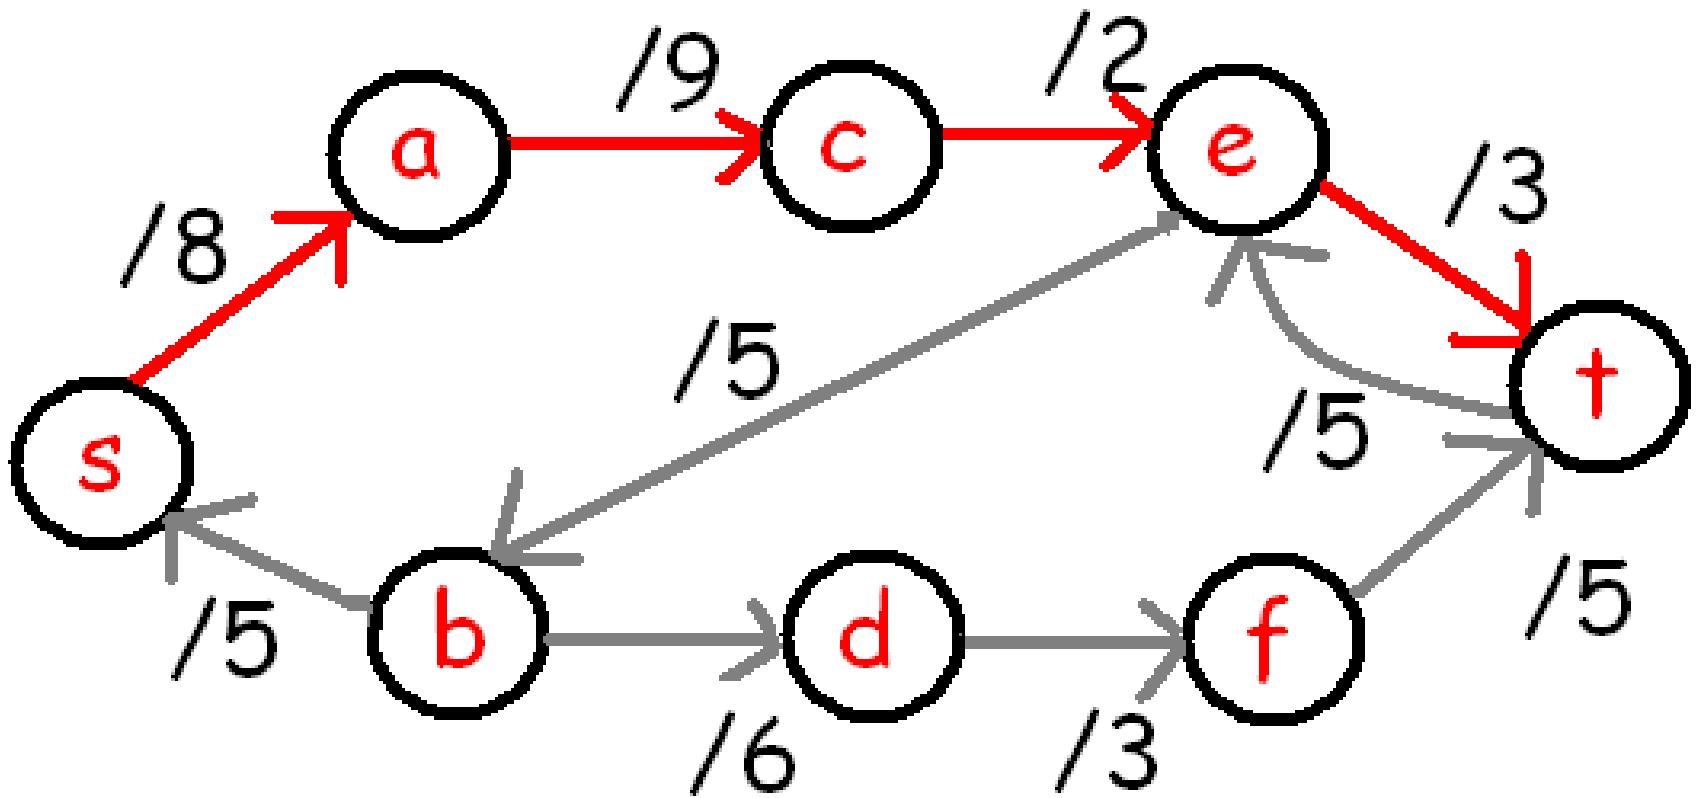



Identify augmenting path:  $s, a, c, e, t$

Capacity of path is 2.

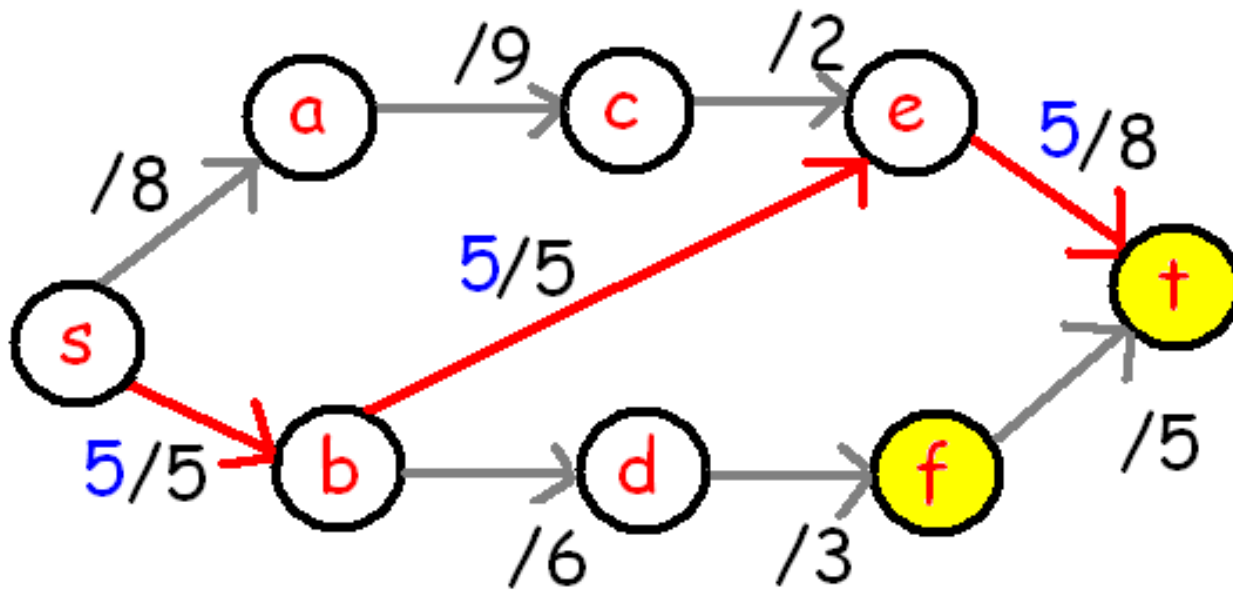



Augment flow:

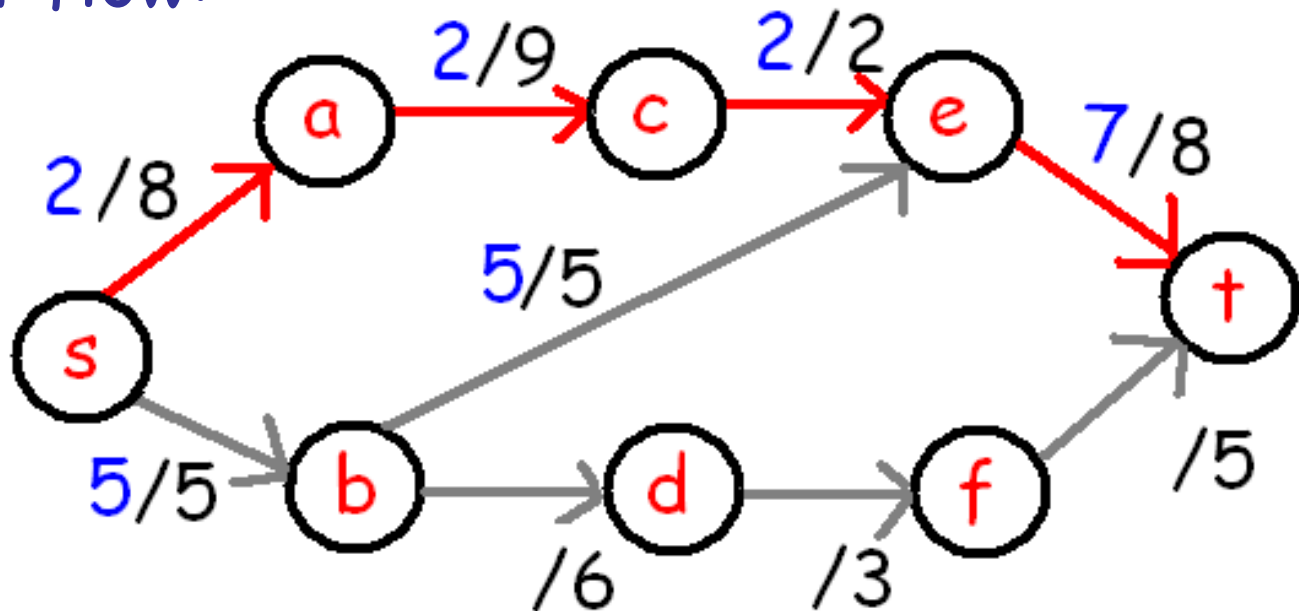

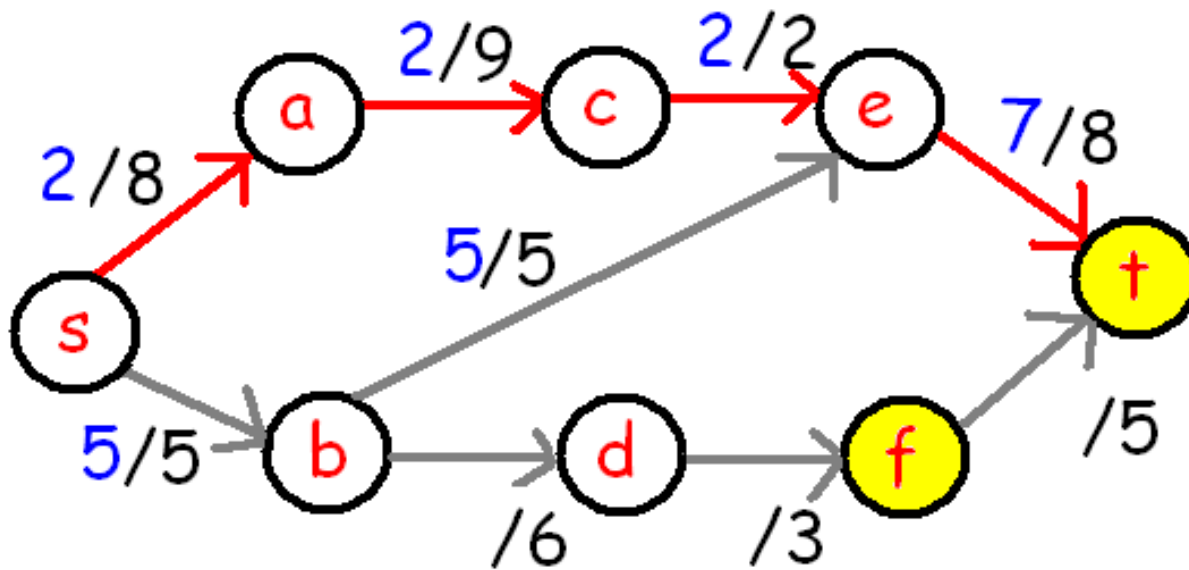


Make new auxillary graph:

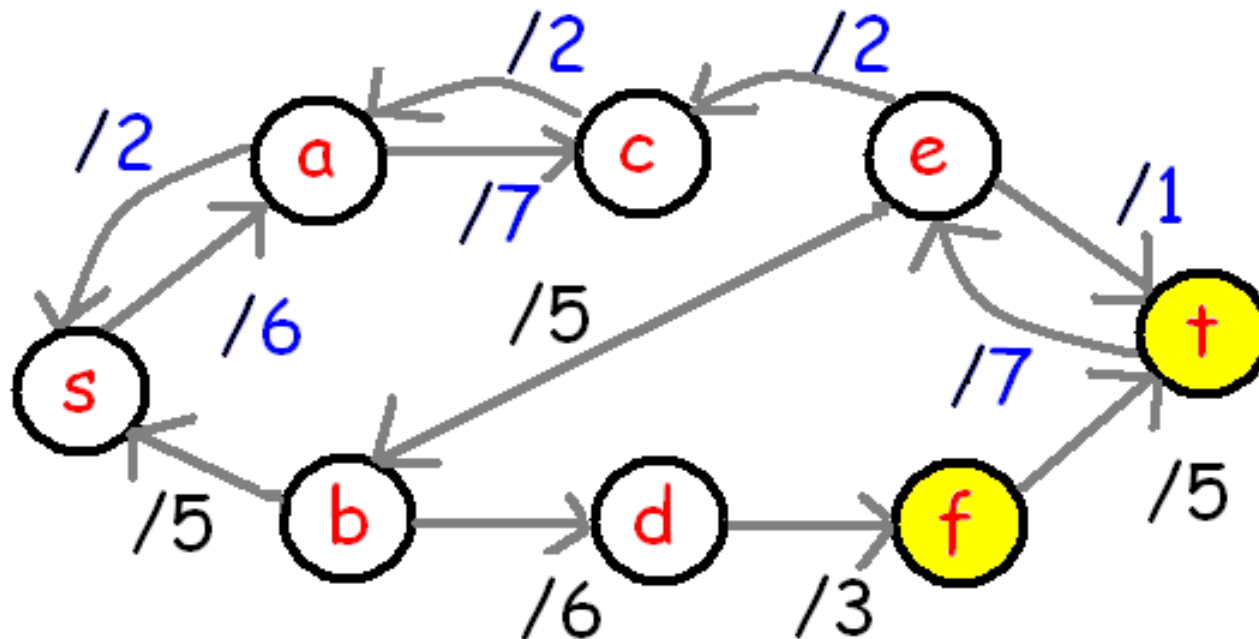

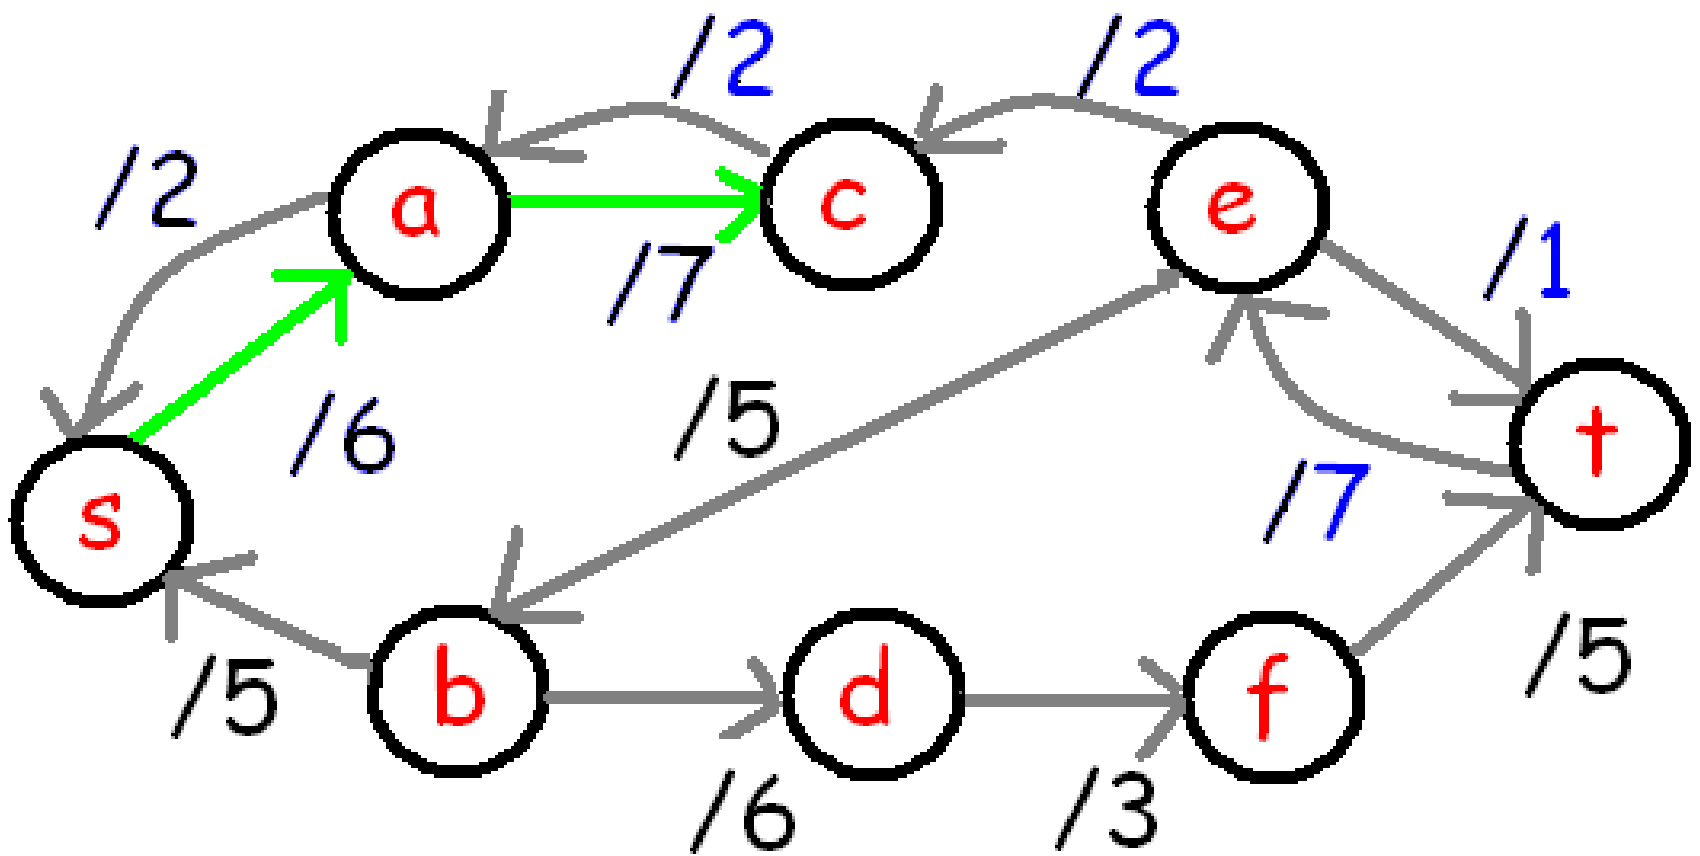


Apply BFS: Cannot reach  $t$ .

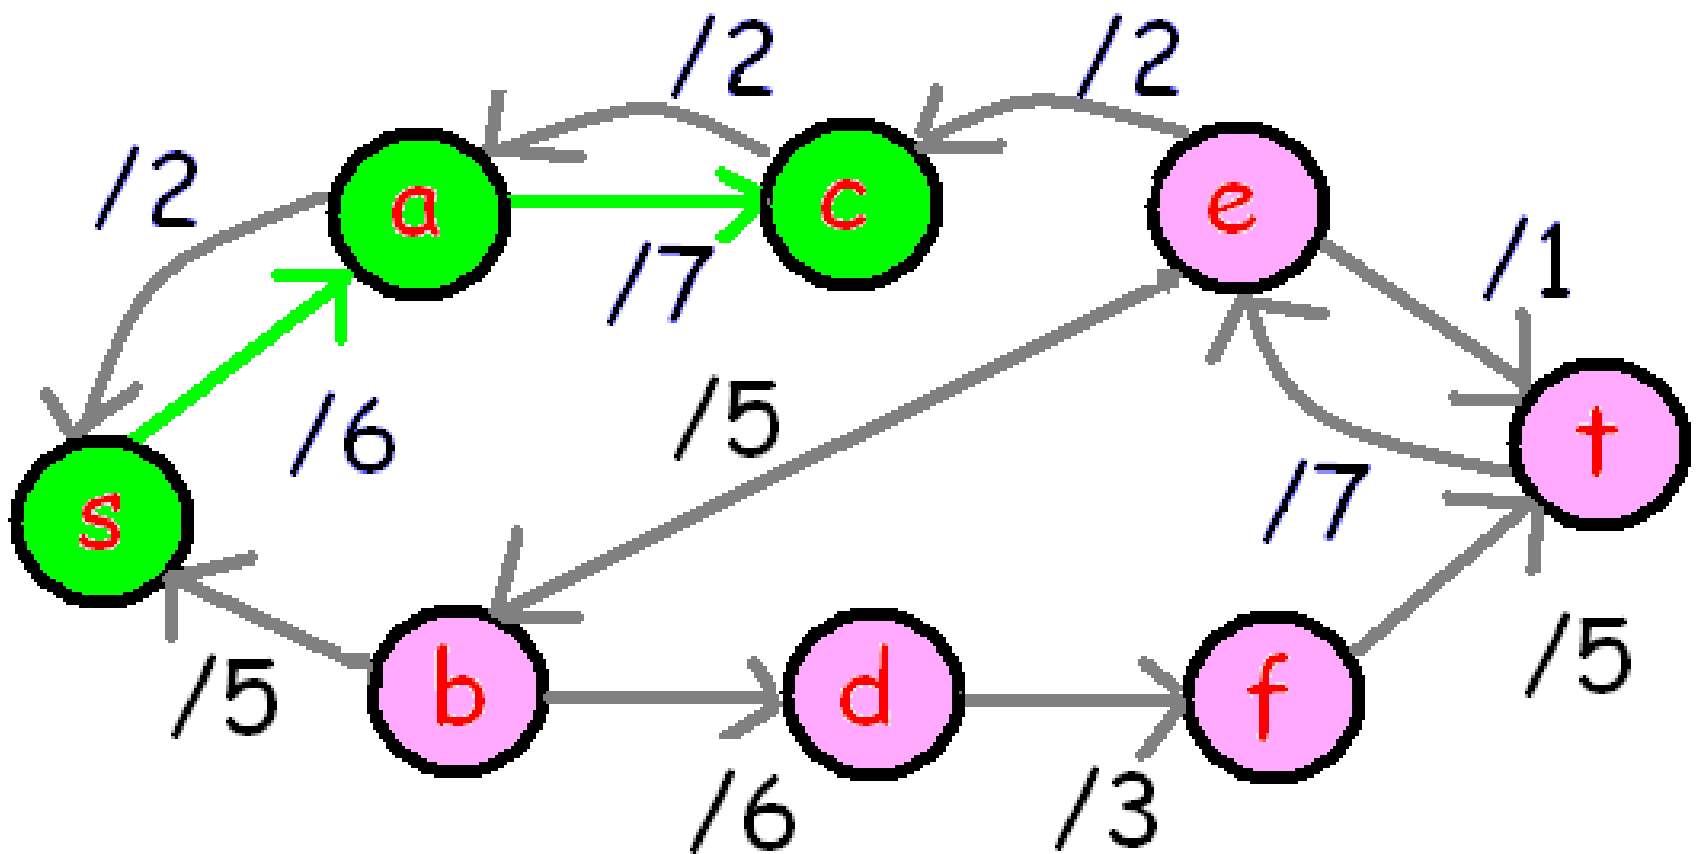

$P = \{u: u \text{ is reachable from } s \text{ on BFS}\}$


$(P, V-P) = \{ (u, v) : u \in P \text{ and } v \notin P \}$ .



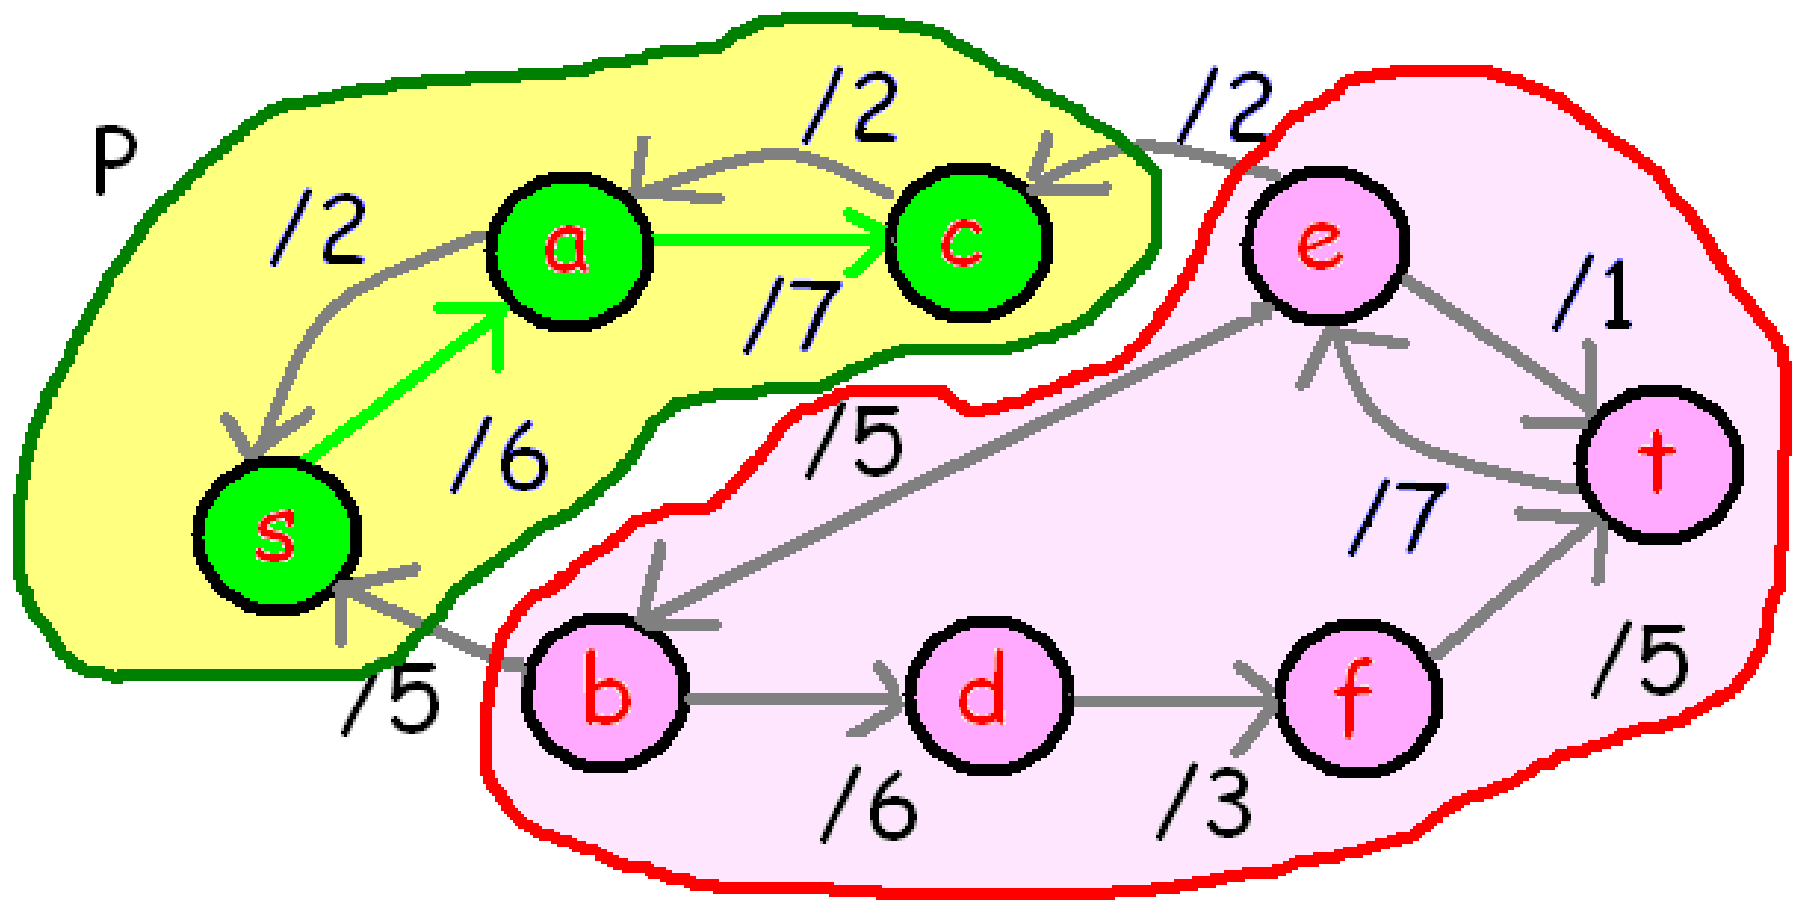

In the auxillary:

$P = \{s, a, c\}$      $V-P = \{b, d, e, f, t\}$

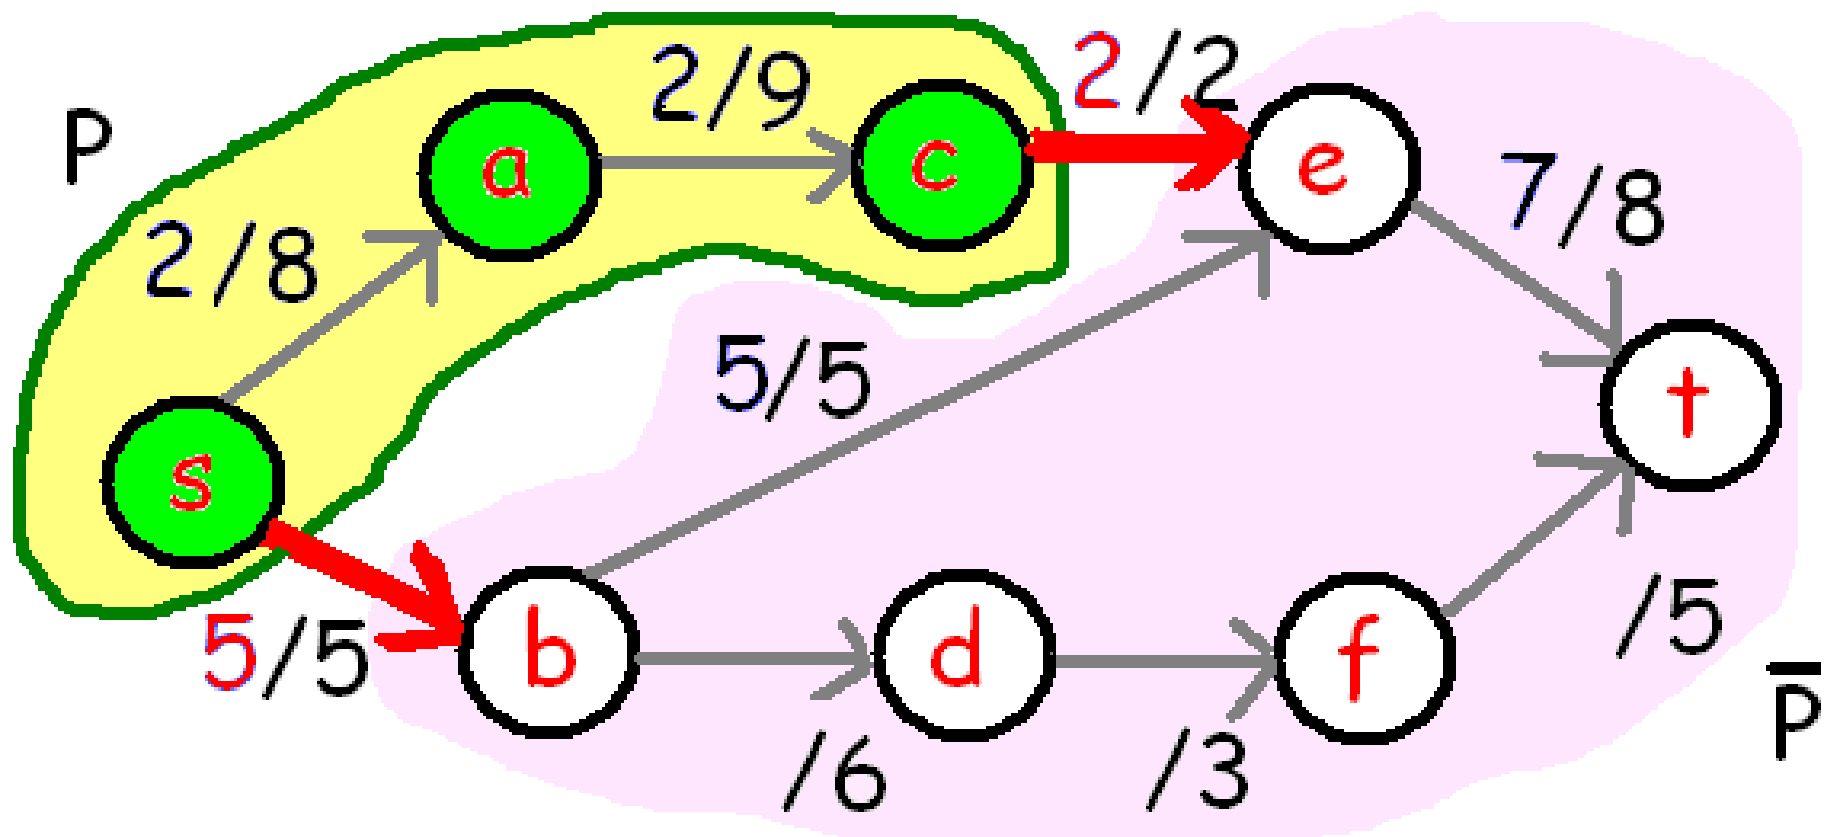

$(P, V-P) = \{ (u, v) : u \in P \text{ and } v \notin P \}.$

So  $(P, V-P) = \{ (s, b), (c, e) \}$

## Max Flow Min Cut Theorem:

In any network, the value of a maximum flow is equal to the capacity of a minimum cut.

